

SUPER FAST RECTIFIERS

VOLTAGE RANGE: 300 --- 400 V
CURRENT: 1.5 A

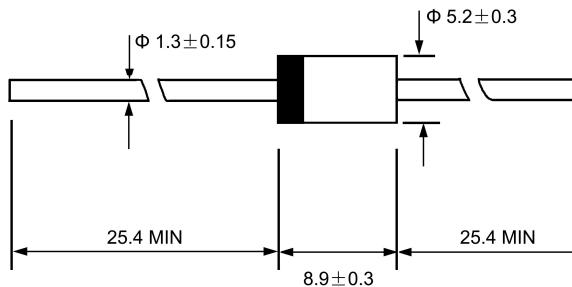
FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol,Isopropanol and similar solvents

MECHANICAL DATA

- ◇ Case: JEDEC DO-27, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

DO - 27



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

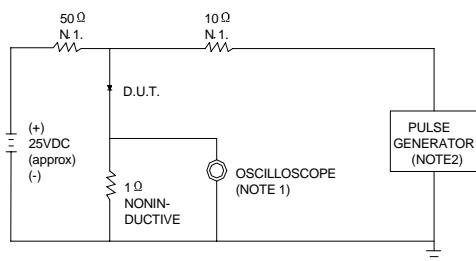
Single phase, half wave, 50Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | | 31DF3 | 31DF4 | UNITS |
|---|-----------------|------------------|-------|--------------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 300 | 400 | V |
| Maximum RMS voltage | V_{RMS} | 210 | 280 | V |
| Maximum DC blocking voltage | V_{DC} | 300 | 400 | V |
| Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$ | $I_{F(AV)}$ | 1.5 | | A |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$ | I_{FSM} | 125.0 | | A |
| Maximum instantaneous forward voltage @ $I_F=3\text{A}$ | V_F | 1.25 | | V |
| Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$ | I_R | 5.0 50.0 | | μA |
| Maximum reverse recovery time (Note1) | t_{rr} | 30 | | ns |
| Typical junction capacitance (Note2) | C_J | 90 | | pF |
| Typical thermal resistance (Note3) | $R_{\theta JA}$ | 34 | | $^\circ\text{C/W}$ |
| Operating junction temperature range | T_J | - 55 ----- + 150 | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | - 55 ----- + 150 | | $^\circ\text{C}$ |

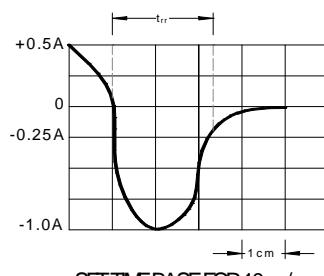
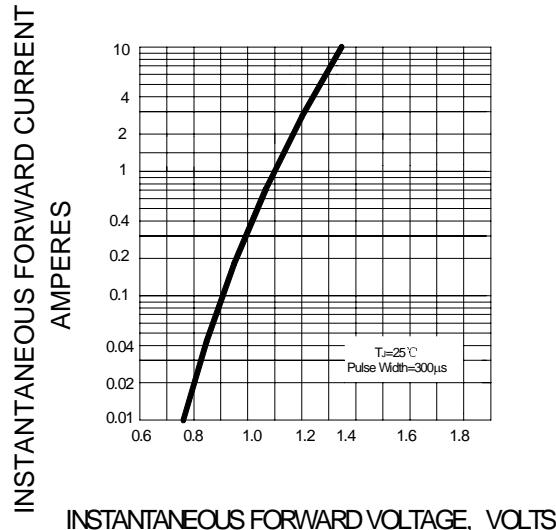
NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

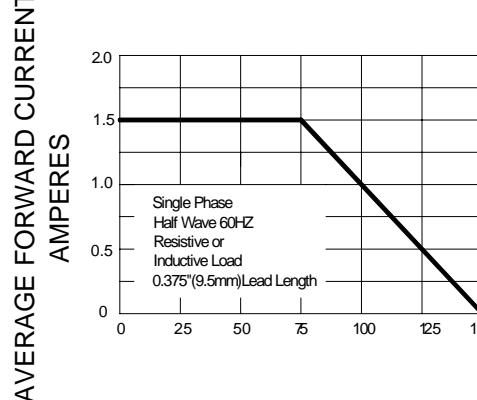
3. Thermal resistance from junction to ambient.

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

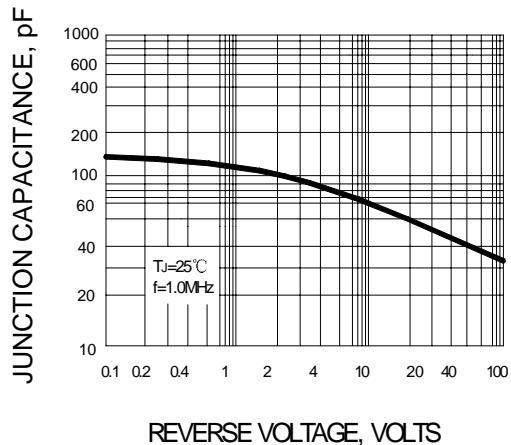
NOTES:
1.RISE TIME = 7ns MAX INPUT IMPEDANCE = 1MΩ. 22pF.
2.RISE TIME = 10ns MAX SOURCE IMPEDANCE = 50 Ω.

FIG.2 – TYPICAL FORWARD CHARACTERISTIC

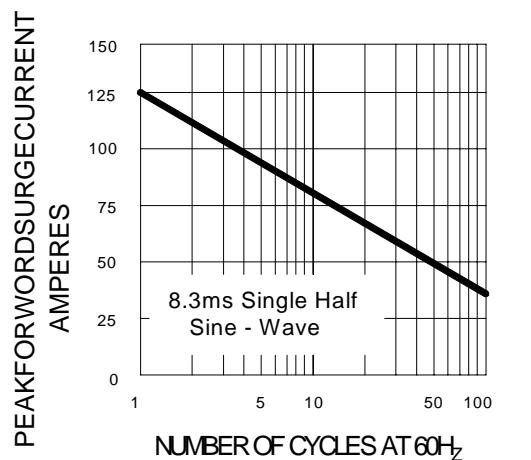
INSTANTANEOUS FORWARD VOLTAGE, VOLTS



AMBIENT TEMPERATURE, °C

FIG.4 – TYPICAL JUNCTION CAPACITANCE

REVERSE VOLTAGE, VOLTS



NUMBER OF CYCLES AT 60Hz