


50(W) x 27 (H) x 75(L) mm

DPS-24GP A

FEATURES


- Total power 24W
- 90-264Vac auto range input
- High reliability: > 100,000 hours @ full load and normal input (25 °C)
- Protection: Short / Over-current / Over-voltage / Over-temperature
- CCC: 5000 meter
- Bulk Cap: JP Type
- Safety: UL/cUL, TUV, CB by Demko ,CCC
- EMI: CLASS B

Input	Voltage range	90~264Vac auto range
	Frequency	47~63Hz
	Efficiency	The average efficiency at 25%, 50%, 75% and 100% load \geq 82%
	Input Current	90~132Vac /12V/2A load \leq 1A 180~264Vac / 12V/2A load \leq 0.5A
Output	12V	0A to 2A
Protection	Over-current	Auto recovery
	Over-temperature	Auto recovery
	Short	Auto recovery
	Over-voltage	Auto recovery
Environment	Operating temp.	0 to 50°C Full load,60°C 80% load,70°C 60% load,
	Storage temp.	-20 to 70°C
	Operating humidity	10% - 90%
	Storage humidity	10% - 95%

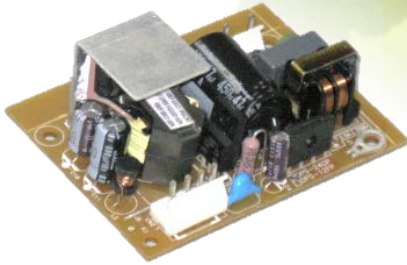

DPS-24GP A

Safety Standards/Directives	Electrical Safety		UL/cUL, TUV, CB by Demko , CCC,CE, KC,BSMI refer to EN 60950-1			
	CE		In conformance with EMC Directive 2004/108/EC and Low Voltage Directive 2006/95/EC			
	EMC		EMI: refer to CISPR 22 ,FCC ,VCCI:CLASS B			
			ESD(IEC61000-4-2)	Air Discharge: $\pm 8KV$ min		
				Contact Discharge: $\pm 4KV$ min.		
			EFT(IEC61000- 4-4)		+/- 1KV	
			Surge(IEC61000-4-5)		Common Mode: +/- 2KV	
Different Mode: +/- 1KV						
Isolation	Input to Output	3.0KVac				



DELTA ELECTRONICS, INC.
 3, TUNG YUAN ROAD, CHUNGLI
 INDUSTRIAL ZONE
 TAOYUAN SHIEH, TAIWAN, R.O.C.
 TEL: 886-3-4526107
 FAX: 886-3-4527314
 mail: powersales@delta.com.tw

DELTA PRODUCTS CORPORATION
 4405 CUSHING PARKWAY
 FREMONT, CA 94538, U.S.A.
 TEL: 1-510-668-5100
 FAX: 1-510-668-0680

DELTA ELECTRONICS(JAPAN) INC.
 DELTA SHIBADAIMON BLDG.
 2-1-14 SHIBADAIMON, MINATO-KU,
 TOKYO, 105-0012, JAPAN
 TEL: 81-3-5733-1111
 FAX: 81-3-5733-1211

DELTA ELECTRONICS, EUROPE LTD.
 2 YOUNG PLACE KELVIN
 INDUSTRIAL ESTATE EAST KILBROIDE,
 GLASGOW G75 OTD, U.K.
 TEL: 44-1355-588888
 FAX: 44-1355-588889

