

Surface Mount Fast Switching Diode BAS16T/BAW70T/BAW56T/BAV99T


FEATURES

- Ultra-Small surface mount package.
 - Fast switching speed.
 - For general purpose switching applications.
 - High conductance.
- Lead-free 

APPLICATIONS

- General purpose switching application.

ORDERING INFORMATION

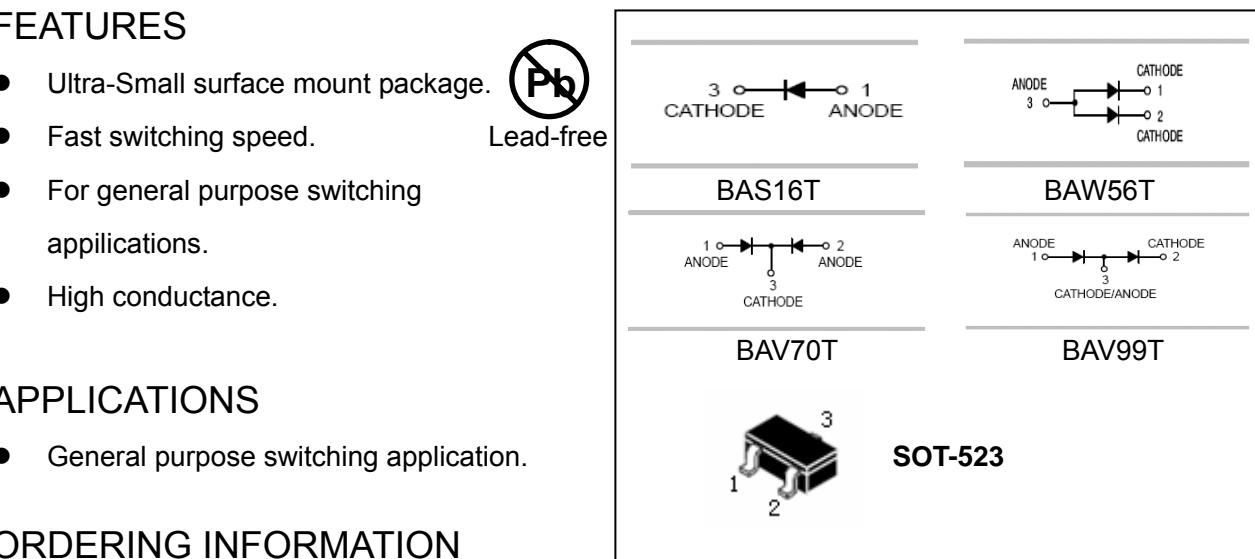

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V_{RRM}	Peak repetitive reverse voltage		
V_{RWM}	Working peak reverse voltage	85	V
V_R	DC reverse voltage		
$V_{R(RMS)}$	RMS reverse voltage	60	V
I_F	Forward continuous voltage single diode double diode	155 75	mA
I_{FRM}	Repetitive peak forward current	500	mA
I_{FSM}	Non-repetitive peak forward surge current @t=1.0μs @t=1.0ms @t=1.0s	4.0 1.0 0.5	A
P_d	Power dissipation	150	mW
$R_{θJA}$	Thermal resistance junction to ambient	833	°C/W
T_j, T_{stg}	Junction and Storage Temperature	-65~150	°C

Diode Semiconductor Korea

Surface Mount Fast Switching Diode

BAS16T/BAW70T/BAW56T/BAV99T

ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)R}$	$I_R=100\mu\text{A}$	85		V
Leakage current	I_R	$V_R=75\text{V}$ $V_R=75\text{V}, T_j=150^\circ\text{C}$ $V_R=25\text{V}, T_j=150^\circ\text{C}$ $V_R=25\text{V}$		2.0 100 60 30	μA μA μA nA
Forward voltage	V_F	$I_F=1.0\text{mA}$ $I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=150\text{mA}$		0.715 0.855 1.0 1.25	V
Transition frequency	f_T	$V_{CE}=5\text{V}, I_C=10\text{mA}, f=100\text{KHz}$	100		MHz
Typical total capacitance	C_T	$V_R=0\text{V}, f=1\text{MHz}$		1.5	pF
Reverse recovery Time	t_{rr}	$I_F=I_R=10\text{mA}, I_{rr}=0.1*I_R, R_L=100\Omega$		4.0	ns

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

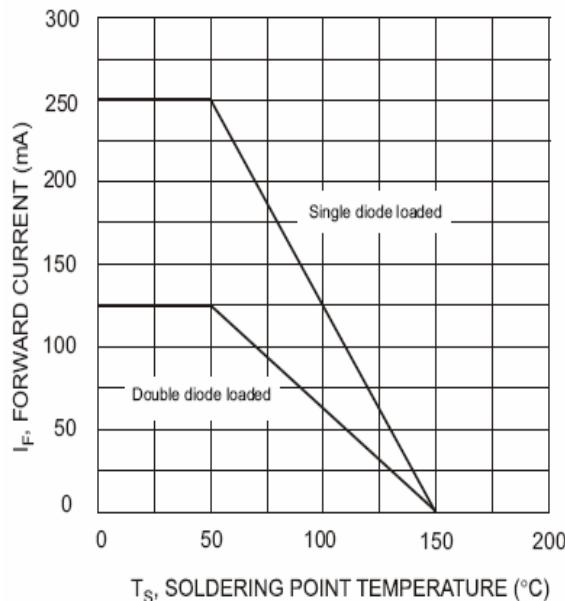


Fig. 1 Current Derating Curve

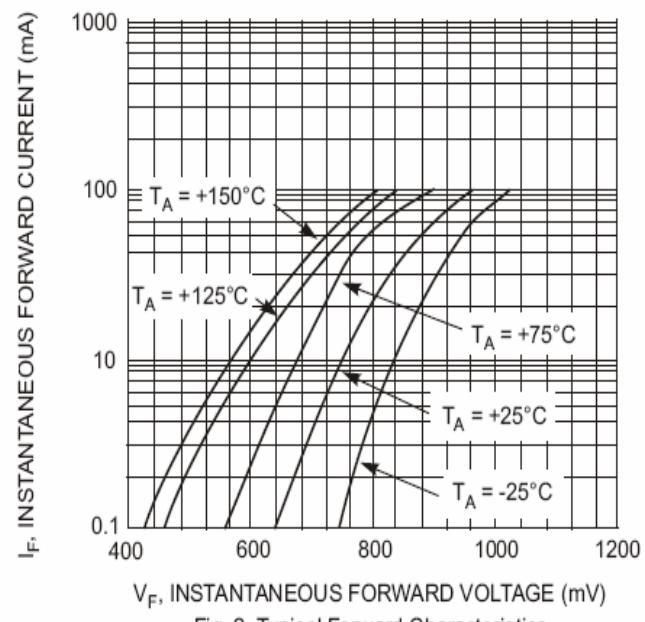


Fig. 2, Typical Forward Characteristics


Diode Semiconductor Korea

Surface Mount Fast Switching Diode BAS16T/BAW70T/BAW56T/BAV99T


PACKAGE OUTLINE

Plastic surface mounted package

SOT-523

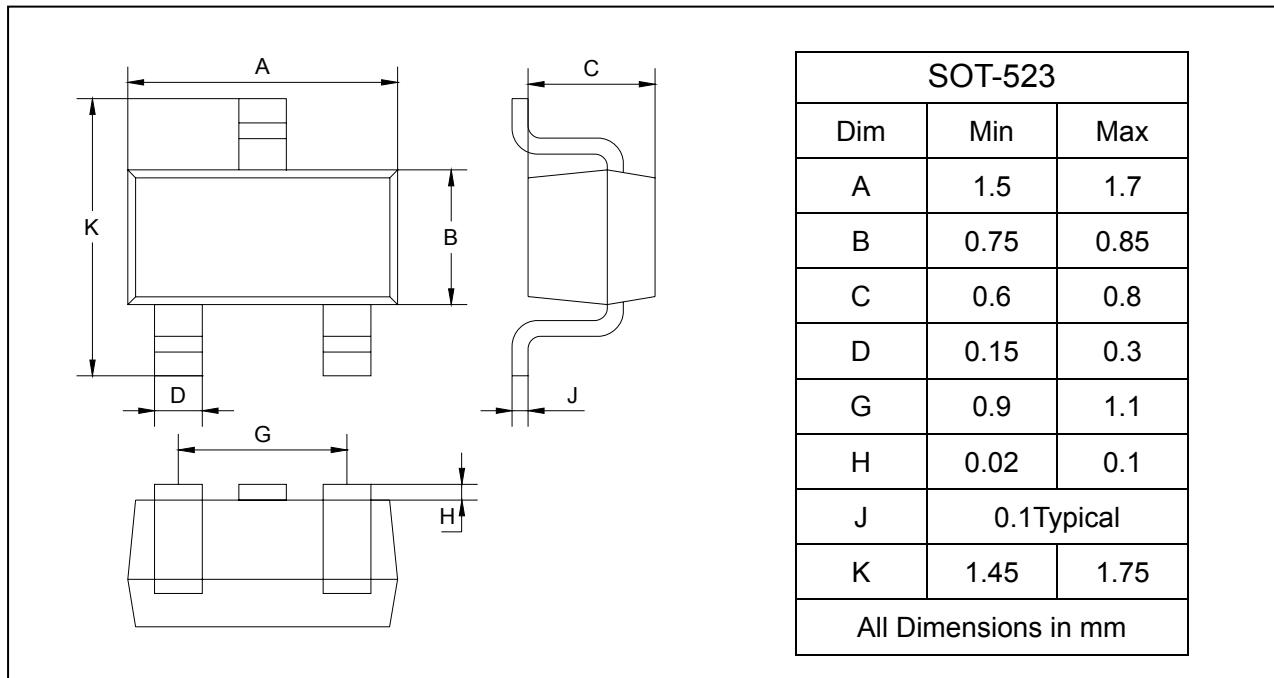

SOLDERING FOOTPRINT

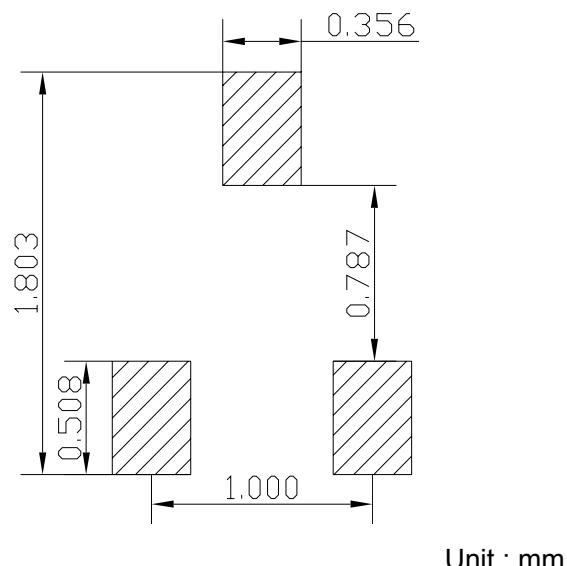

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
BAS16T/BAW56T/BAV70T/BAV99T	SOT-523	3000/Tape&Reel