




Common Mode Choke

ACMC-0811S

- SMD Package
- CM Filters for Data Communications and Telecom applications
- Operating Temperature range: -40°C to +85°C
- Maximum reflow temperature: 250°C/-5°C for 20-40 seconds (Refer to IPC/JEDEC J-STD-02C Standard)

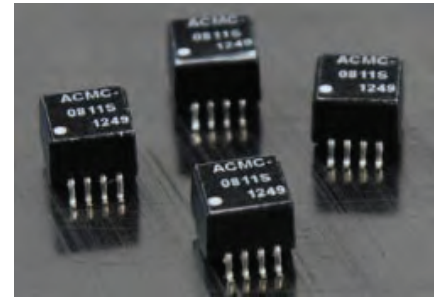


Electrical Specifications @25°C						
Part Number	Turns Ratio (± 3%)	OCL (uH typ)	LI (uH Max)	CWW (pF Max)	DCR (Ω Max)	HI-POT 1sec/1mA
ACMC-0811S	1:1:1:1	24	0.2	18	0.4	500 Vrms
Part Number	Impedance (Ω typ)					
	1MHz	10MHz	50MHz	100MHz	200MHz	500MHz
ACMC-0811S	250	1000	1700	1500	750	250


All specifications subject to change without notice.

MECHANICAL


Dimensions

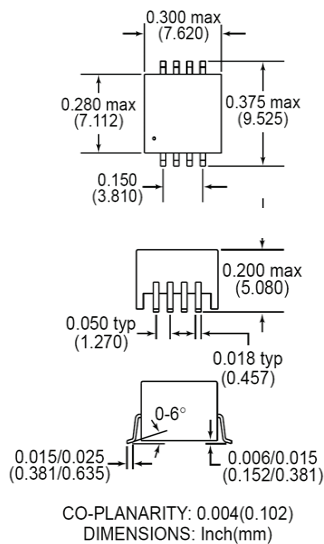

Marking



Remark:
YYWW=DATE CODE
YY=YEAR; WW=WEEK



Schematics