### C1005NP01H090D050BA



#### TDK item description C1005NP01H090DT\*\*\*\*

Applications	Commercial Grade Please refer to Part No. <u>CGA2B2NP01H090D050BA</u> for Automotive use.	T
Feature	150°C High Temperature Application	
Series	C1005 [EIA 0402]	18 0
Status	Production	Dimension

	Size
Length(L)	1.00mm ±0.05mm
Width(W)	0.50mm ±0.05mm
Thickness(T)	0.50mm ±0.05mm
Terminal Width(B)	0.10mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern (PA)	0.30mm to 0.50mm
Recommended Land Pattern (PB)	0.35mm to 0.45mm
Recommended Land Pattern (PC)	0.40mm to 0.60mm

Electrical Characteristics			
Capacitance	9pF ±0.5pF		
Rated Voltage	50VDC		
Temperature Characteristic	NPO(0±30ppm/°C)		
Q (Min.)	580		
Insulation Resistance (Min.)	10000ΜΩ		


Other		
Soldering Method	Reflow	
AEC-Q200	No	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	10000pcs	

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.

## C1005NP01H090D050BA




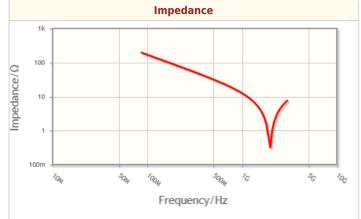



## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

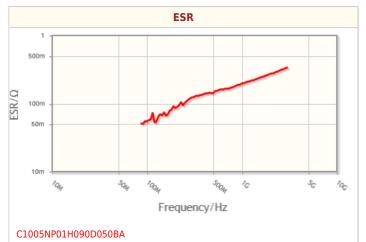

### C1005NP01H090D050BA

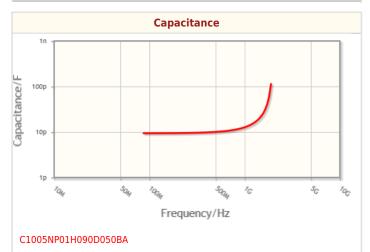

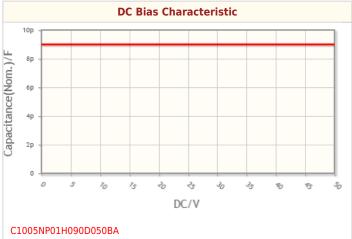

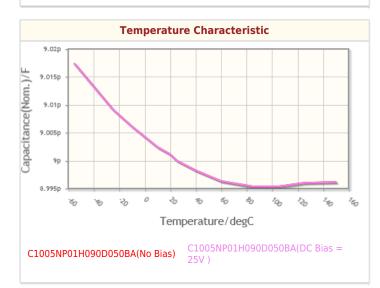

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.

## C1005NP01H090D050BA



# Associated Images



! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.