
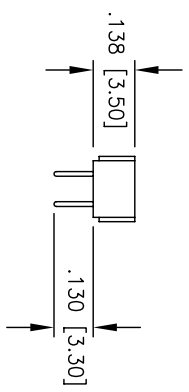
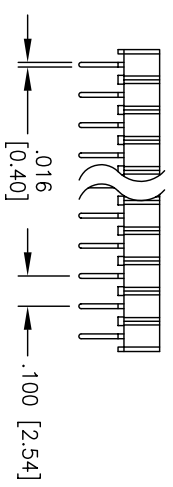
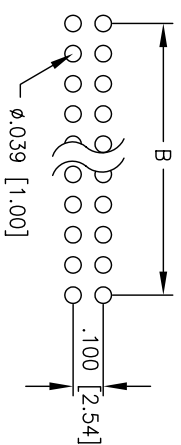


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/13/05	

APPROVED: _____ TITLE: _____
 DATE: _____

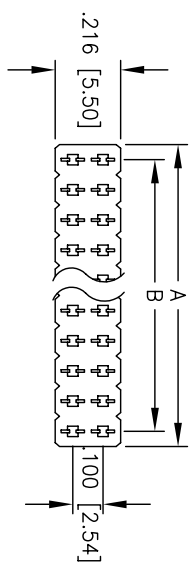

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Tin over Copper underplate overall
Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 230 for 5 sec.

A = .100 [2.54] X No. of Positions Per Row
 B = .100 [2.54] X No. of Spoces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RECEPTACLE STRIP, VERY LOW PROFILE,
 DUAL ROW, TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	5/13/05
CHECKED	
APPROVED	

TITLE	RSVL-2A-XX-T	
SIZE	PART NO.	REV.
X	RSVL-2A-XX-T	-
REF:	SCALE: MTS	SHEET 1 OF 1

