


MATERIALS

| | |
|------------------|----------------------------|
| BODY | BRASS NICKLE PLATED |
| CONTACT | GOLD PLATED |
| INSULATOR | PTFE |
| | |

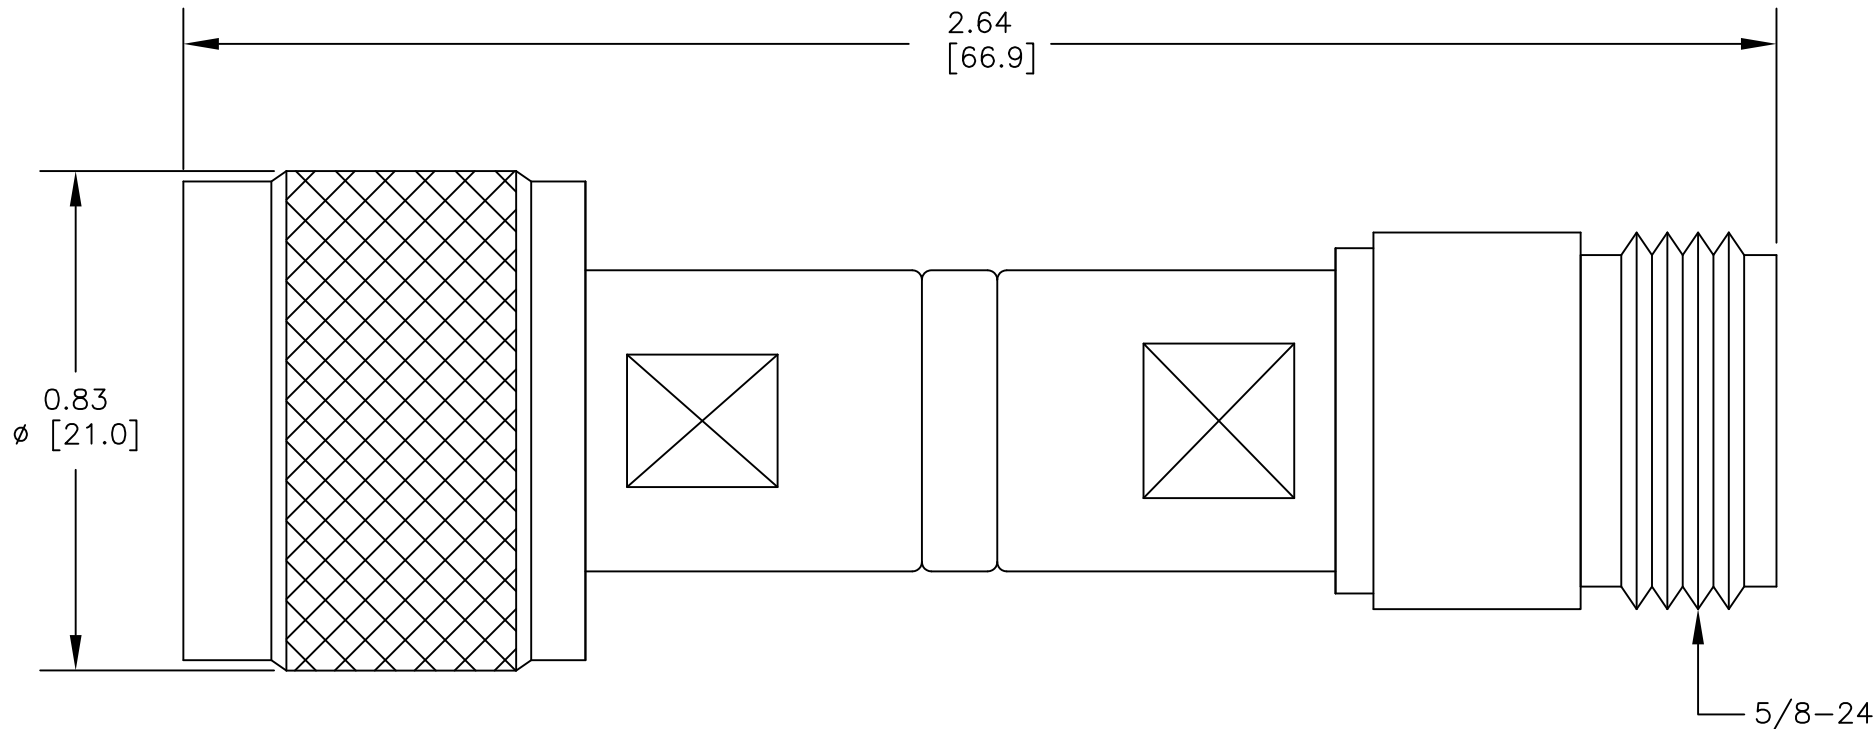

SPECIFICATIONS

FREQUENCY RANGE: DC TO 1,000 MHz
 IMPEDANCE: 50 OHMS
 VSWR: 1.5 @ 500 MHz
 1.75 @ 1000 MHz

FUSE ELEMENT: 1/16 AMP

FUSE LEVEL: +23 dBm



PASTERNACK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE

PE7300-1

DES.

N FUSE HOLDER, FREQUENCY RANGE: DC TO 1,000 MHz

REV. A

FSCM NO. 53919

CAD FILE 032612

SCALE N/A

SIZE A

2233

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].