

Ultra fast Rectifier

BYV29-500

FEATURES



- High surge capacity
- Low forward voltage
- Fast switching
- Soft recovery characteristic
- Reverse surge capability
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Power supply-output rectification
- Power management
- Instrumentation

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _R RM V _R WM V _R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	500	V
I _F (AV)	Average Rectified Forward Current (Rated V _R)	9	A
I _{FM}	Peak Repetitive Forward Current (Rated V _R , Square Wave,20kHz)	18	A
I _{FSM}	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase)	50Hz 60Hz 100 110	A
T _J	Junction Temperature	-40~150	°C
T _{stg}	Storage Temperature Range	-40~150	°C

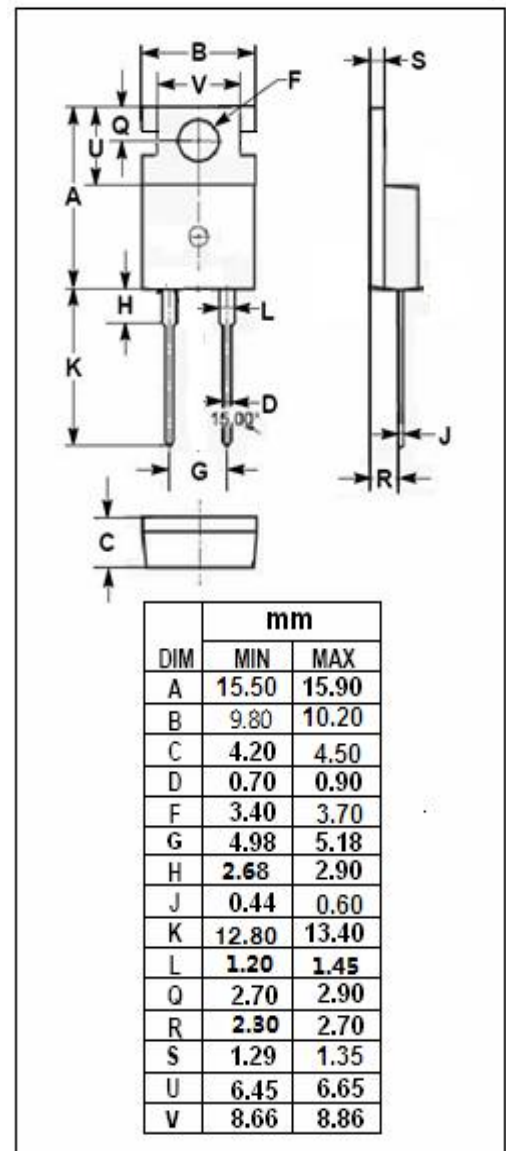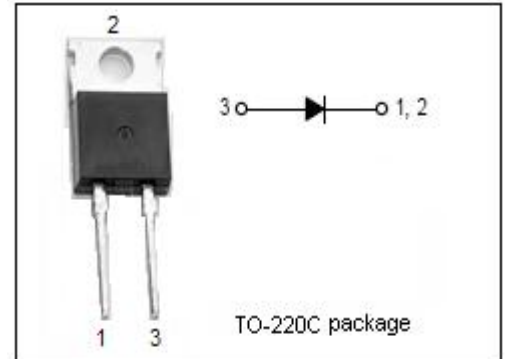

Ultra fast Rectifier

BYV29-500

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-b}$	Thermal Resistance, Junction to Mounting Base	2.5	$^{\circ}C/W$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	60	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$) (Pulse Test: Pulse Width=300 μ s, Duty Cycle \leq 2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F	Maximum Instantaneous Forward Voltage	$I_F=8A; T_j=25^{\circ}C$ $I_F=8A; T_j=150^{\circ}C$ $I_F=20A; T_j=25^{\circ}C$	1.25 1.03 1.40	V
I_R	Maximum Instantaneous Reverse Current	$V_R=V_{RWM}; T_j=25^{\circ}C$ $V_R=V_{RWM}; T_j=100^{\circ}C$	50 350	μA
t_{rr}	Maximum Reverse Recovery Time	$I_F=1A; di/dt=50A/\mu s; V_R=30V$	60	ns