

# SHE144RE(B)

Oval Type High Efficiency LED Lamp

#### **Features**


- Red colored transparency lens type
- Ellipse type(X=4.6mm, Y=5.8mm)
- Ultra luminosity
- Flangeless package
- High power LEDs
- Oval shape
- Lens Color: Red
- $\bullet$  View Angle : 70  $^{\circ}$  / 34  $^{\circ}$

### **Application**

- Full color displays
- Message boards
- Variable message signs(VMS)

#### **Outline Dimensions**

unit: mm

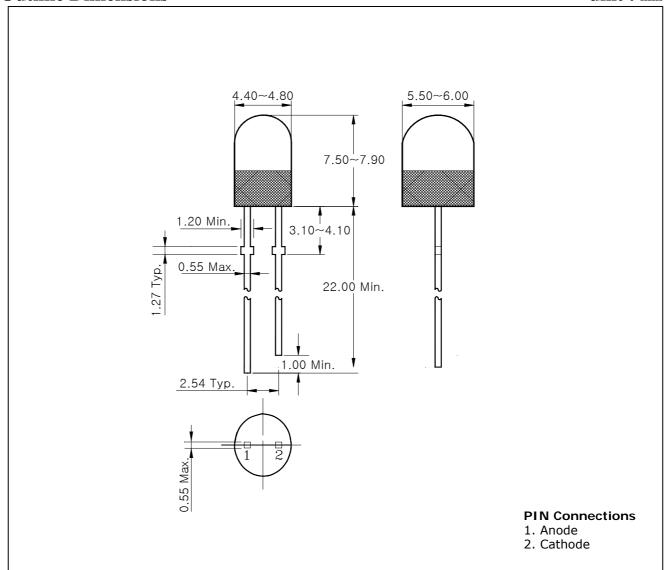

**Absolute Maximum Ratings** 

 $(Ta=25^{\circ}C)$ 

Characteristic	Symbol	Rating	Unit
Power dissipation	P <sub>D</sub>	100	mW
Forward current	$I_{F}$	40	mA
*1Peak forward current	${ m I}_{\sf FP}$	65	mA
Reverse voltage	$V_R$	4	V
Operating temperature range	$T_{opr}$	-20~85	$^{\circ}$
Storage temperature range	$T_{stg}$	-25~100	$^{\circ}$
*2Soldering temperature	$T_{sol}$	260℃ for 10 seconds	

<sup>\*1.</sup>Duty ratio = 1/16, Pulse width = 0.1ms

<sup>\*2.</sup>Keep the distance more than 2.0mm from PCB to the bottom of LED package



### **Electrical / Optical Characteristics**

 $(Ta=25^{\circ}C)$ 

2

Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Forward voltage	$V_{F}$	I <sub>F</sub> = 20mA	-	2.1	2.5	V
Luminous intensity	I <sub>V</sub>	I <sub>F</sub> = 20mA	230	-	1170	mcd
Peak wavelength	$\lambda_{P}$	I <sub>F</sub> = 20mA	-	660	-	nm
Spectrum bandwidth	$\Delta_{\lambda}$	I <sub>F</sub> = 20mA	-	20	-	nm
Reverse current	$I_{R}$	V <sub>R</sub> =4V	-	-	10	uA
Half angle	θ1/2 X	I <sub>F</sub> = 20mA	-	±17	-	deg
	91/2 Y		-	±35	-	ueg

<sup>\*3.</sup>  $\theta$ 1/2 is the off-axis angle where the luminous intensity is 1/2 the peak intensity

<sup>\*4.</sup> Luminous Intensity Classification

N	0	Р	Q
230~350	350~520	520~780	780~1170

<sup>\*4.</sup> Luminous intensity maximum tolerance for each grade classification limit is  $\pm 18\%$ 

## SHE144RE(B)

### **Characteristic Diagrams**

Fig. 1  $I_F$  -  $V_F$ 



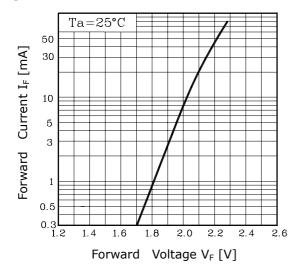


Fig. 2  $I_V$  -  $I_F$ 

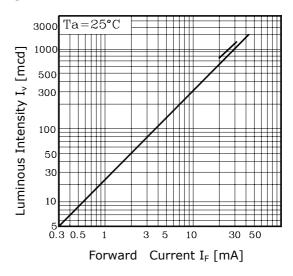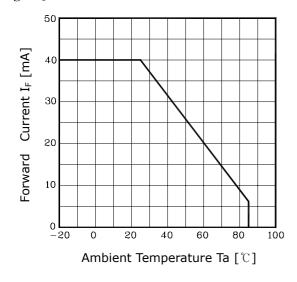

 $Fig. \ 3\ I_F-Ta$ 



**Fig.4 Spectrum Distribution** 

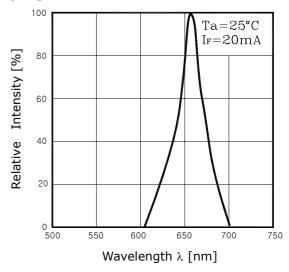


Fig. 5-1 Radiation Diagram(X)


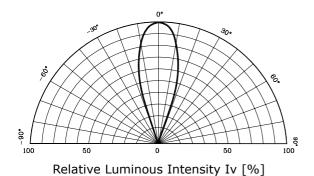


Fig. 5-2 Radiation Diagram(Y)

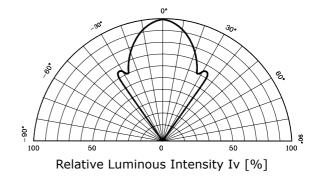

3

## SHE144RE(B)

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.