

**3 EMI FILTERS/2 TVS ARRAYS****APPLICATIONS**

- ✓ Cellular Phones
- ✓ Notebooks
- ✓ Personal Digital Assistant (PDA)
- ✓ Ground Positioning System (GPS)
- ✓ SMART Cards

**IEC COMPATIBILITY (EN61000-4)**



- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

**FEATURES**

- ✓ ESD Protection > 25 kilovolts
- ✓ Bidirectional EMI Filtering/TVS Low Pass Filters
- ✓ Low Insertion Loss: -3db Roll-Off @ 77/85 MHz
- ✓ Protects Up to Five(5) Data Lines
- ✓ RoHS Compliant on Lead-Free Versions

**MECHANICAL CHARACTERISTICS**

- ✓ Flip Chip Package
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Available in Tin-Lead or Lead-Free Plating
- ✓ Solder Reflow Temperature:
  - Tin-Lead - Sn/Pb, 85/15: 240-245°C
  - Lead-Free - Sn/Ag/Cu, 96/3.5/0.5: 260-270°C
- ✓ Flammability rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481

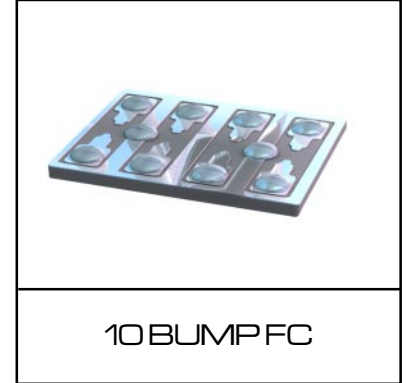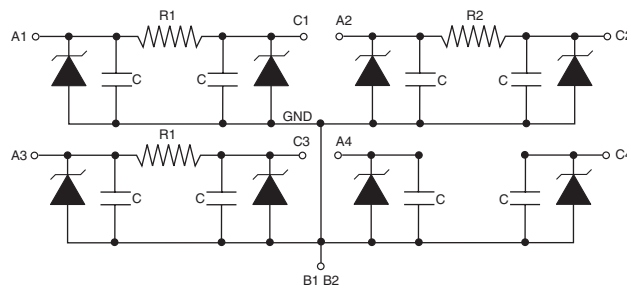**PIN CONFIGURATION**

$$R_1 = 100 \text{ Ohms}$$

$$R_2 = 47 \text{ Ohms}$$

---

 DEVICE CHARACTERISTICS
 

---


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	$T_J$	-40°C to 85°C	°C
Storage Temperature	$T_{STG}$	-55°C to 150°C	°C
DC Power Per Resistor	P	100	mW
Typical Resistance @ ± 20%	$R_1$	100	OHMS
Typical Resistance @ ± 20%	$R_2$	47	OHMS

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM REVERSE LEAKAGE CURRENT	TYPICAL FORWARD VOLTAGE	MINIMUM ATTENUATION	CUT-OFF FREQUENCY	TYPICAL CAPACITANCE PER LINE (See Note 1)
	$V_{WM}$ VOLTS	@ 1mA $V_{(BR)}$ VOLTS	@ 3V $I_b$ $\mu A$	@ 10mA $V_F$ VOLTS	@ 800-3000 MHz dB	$f_c$ MHz	@ 2.5V, 1 MHz C pF
EM1402	5.0	6.0	0.1	0.8	30	77/85	40


**Note 1:** ±20% tolerance.

GRAPHS

**FIGURE 1  
RESISTANCE VS TEMPERATURE  
(Normalized to Resistance at 25°C)**

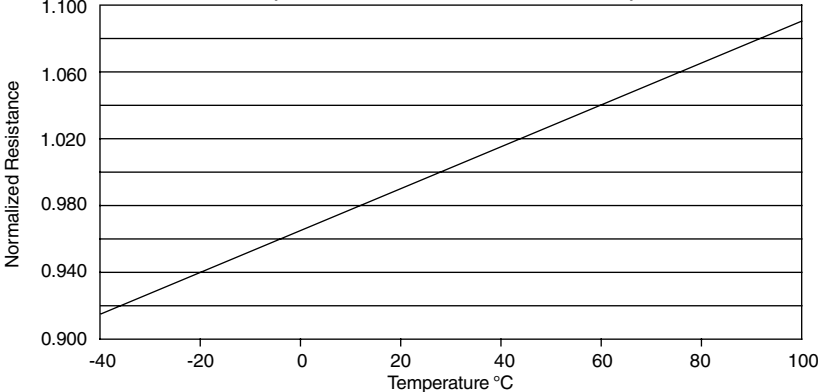

**FIGURE 2  
OVERSHOOT & CLAMPING VOLTAGE FOR EM1402**

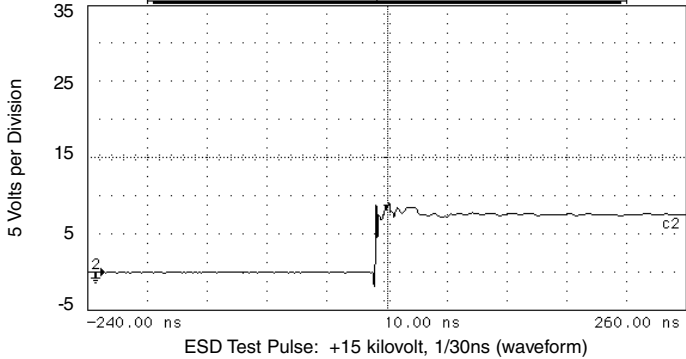

## APPLICATION NOTE

The EM1402 provides a bidirectional filter and protector for all the signals and the power line on the SIM (subscriber identity module) card connector. SIM cards are found in all GSM cellular phones and in some other handheld devices or card readers. The ESD diodes protect the controller against possible ESD strikes that may occur when the connector pins are exposed during direct contact or during insertion of the SIM card into the card slot. The EMI filter suppresses all high-frequency noise, preventing the unwanted EMI signals from both entering and exiting the main board. The signals that interface with the SIM card are the Reset, the Clock and the bidirectional data I/O as shown in Figure 1.

For best filter and ESD performance, both ground bumps (B1, B2) of the EM1402 should be directly connected to the ground plane. A small capacitor of about  $1\mu\text{F}$  is required next to the  $V_{CC}$  pin of the SIM connector in order to improve stability of the SIM card supply rail.

**CIRCUIT BOARD LAYOUT RECOMMENDATIONS**

Circuit board layout is critical for Electromagnetic Compatibility (EMC) protection. The following guidelines are recommended:

- ✓ The protection device should be placed near the input terminals or connectors, the device will divert the transient current immediately before it can be coupled into the nearby traces.
- ✓ The path length between the TVS device and the protected line should be minimized.
- ✓ All conductive loops including power and ground loops should be minimized.
- ✓ The transient current return path to ground should be kept as short as possible to reduce parasitic inductance.
- ✓ Ground planes should be used whenever possible. For multilayer PCBs, use ground vias.

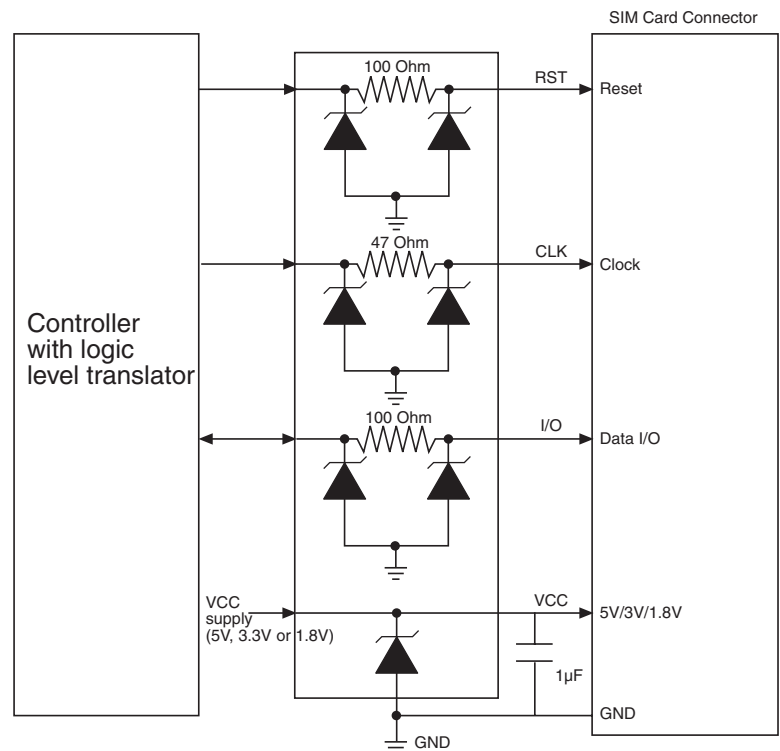




Figure 1. Typical Application for SIM Card Interface

APPLICATION INFORMATION


PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	VALUE
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP(Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	±50µm
Solder Ball Side Coplanarity	±20µm
Maximum Dwell Time Above Liquidous (183°C)	60 Seconds
Soldering Maximum Temperature	270°C

REQUIREMENTS
<p><b>Temperature:</b></p> <p><math>T_p</math> for Lead-Free (SnAgCu): 260-265°C</p> <p><math>T_p</math> for Tin-Lead: 240-245°C</p> <p>Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area &amp; plating.</p>

RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

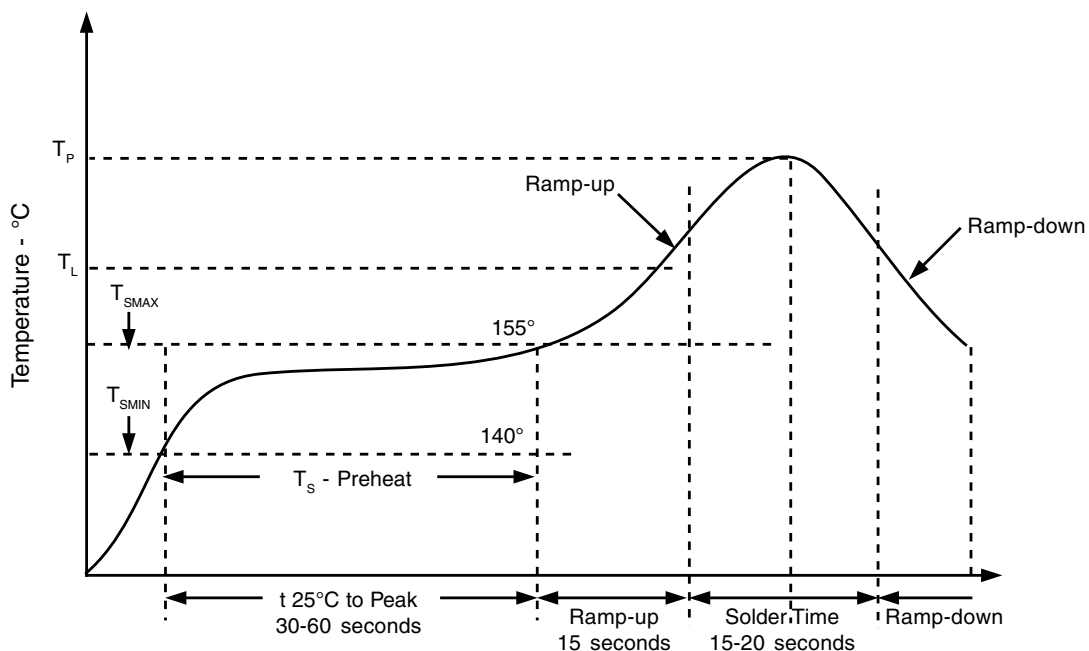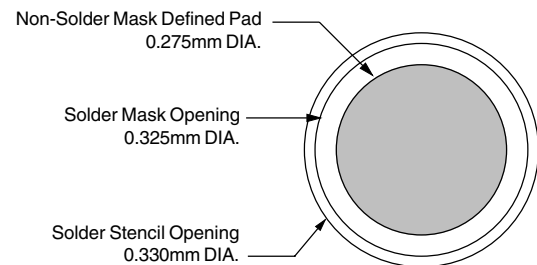


## PACKAGE OUTLINE & DIMENSIONS

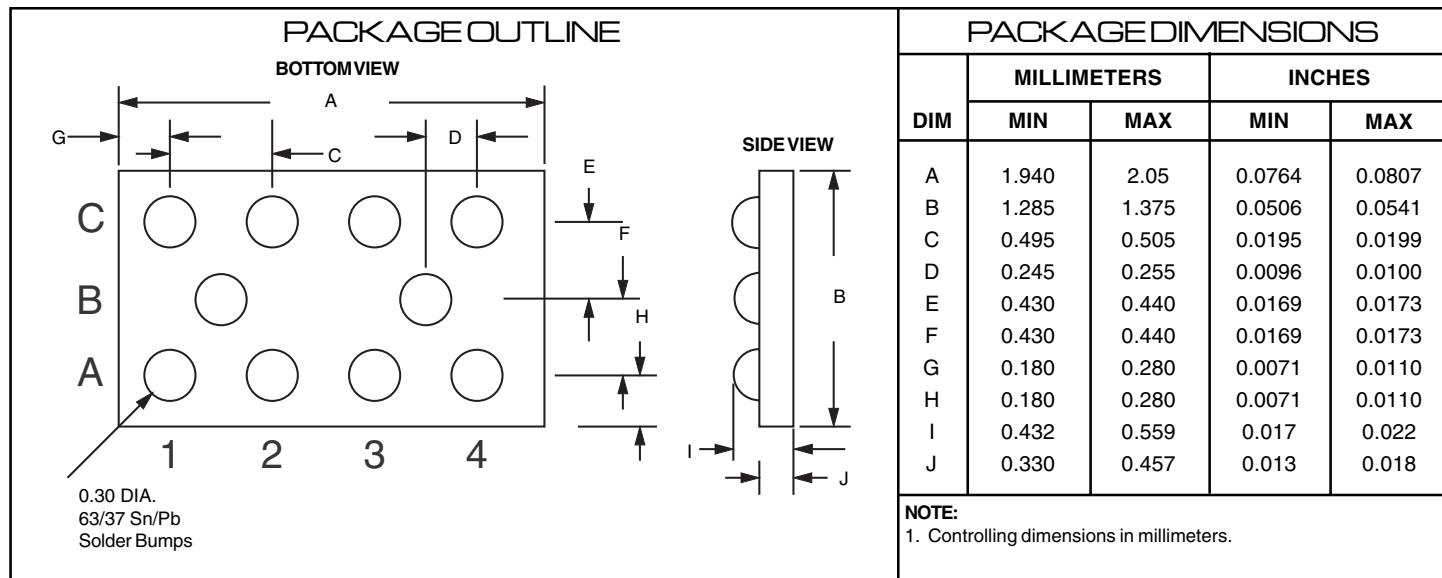

## TAPE & REEL SPECIFICATIONS

PART NUMBER	TAPEWIDTH W	REEL DIAMETER	QTY PER REEL	P <sub>0</sub>	P <sub>1</sub>
EM1402	8mm	7"	3,000	4mm	4mm

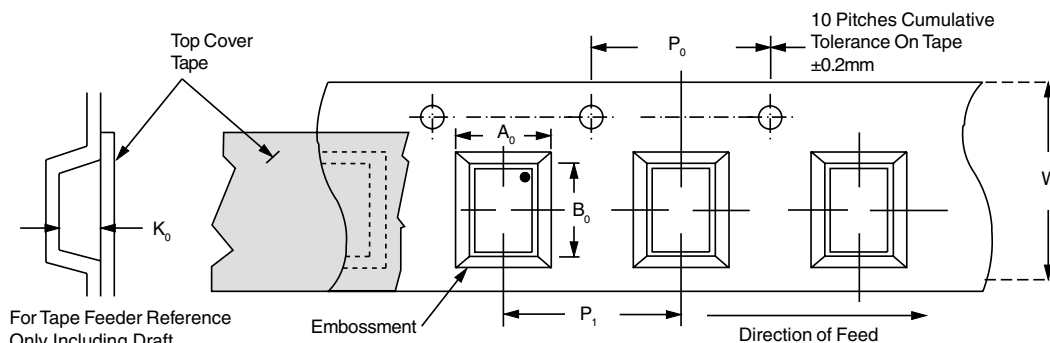

### TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA-481.
2. Plastic 8mm Tape: Suffix-T73-1 = 7 Inch Reel - 3,000 pieces per reel, i.e., EM1402-T73-1.
3. Suffix - LF - Lead-Free, i.e., EM1402-LF-T73-1.
4. Suffix - C - Coated, i.e., EM1402-LF-T73C-1.

#### COPYRIGHT © ProTek Devices 2005

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

#### ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)

Web Site: [www.protekdevices.com](http://www.protekdevices.com)