

Rectifier diode

1SR156-400

● Applications

High speed rectification


● Features

- 1) Small surface mounting type. (PMDS)
- 2) $V_{RM}=400V$ guaranteed while maintaining high speed.
- 3) High reliability.

● Construction

Silicon diffused junction

● External dimensions (Units : mm)

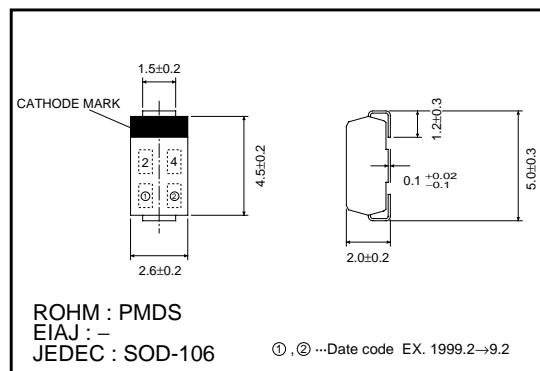

● Absolute maximum ratings ($T_a = 25^\circ C$)

Parameter	Symbol	Limits	Unit
Absolute peak reverse voltage	V_{RSM}	500	V
Peak reverse voltage	V_{RM}	400	V
Mean rectifying current	I_o	1.0	A
Peak forward surge current *	I_{FSM}	20	A
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55~+150	$^\circ C$

* 60Hz for 1 mA

● Electrical characteristics ($T_a = 25^\circ C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_F	–	–	1.3	V	$I_F=0.8A$
Reverse current	I_R	–	–	10	μA	$V_R=400V$
Reverse recovery time	t_{rr}	–	–	0.4	μs	$I_F=I_R=10mA, I_{rr}=1mA$

Diodes

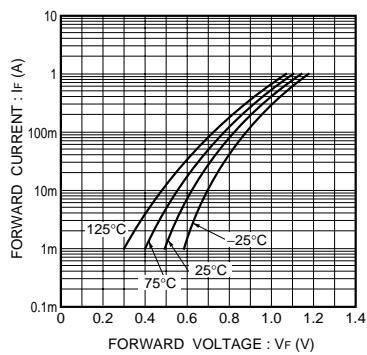
● Electrical characteristic curves ($T_a = 25^\circ\text{C}$)

Fig.1 Forward characteristics

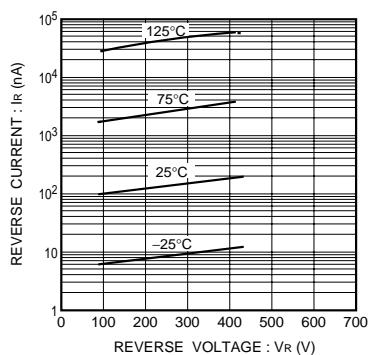


Fig.2 Reverse characteristics

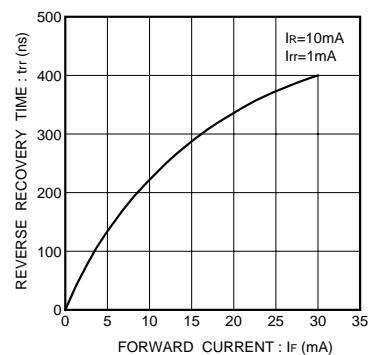


Fig.3 Reverse recovery time characteristics

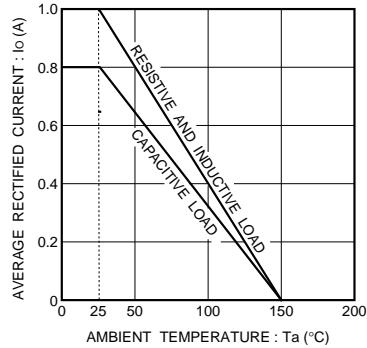


Fig.4 Derating curve

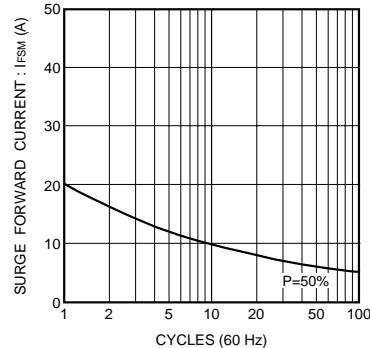
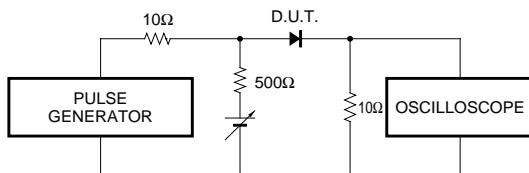


Fig.5 Maximum peak forward surge current characteristics

Fig.6 Reverse recovery time (t_{rr}) measurement circuit