

### Surface Mount Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system.

- \* Low Forward Voltag.
- \* Low Switching noise.
- \* High Current Capacity
- \* Guarantee Reverse Avalance.
- \* Guard-Ring for Stress Protection.
- \* Low Power Loss & High efficiency.
- \* 125 °C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Cnduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

**MAXIMUM RATINGS**


Characteristic	Symbol	MS20	MS21	MS22	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	20	30	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectifier Forward Current	$I_O$	3.0			A
Peak Repetitive Forward Current ( Rate $V_R$ , Square Ware 20 kHz )	$I_{FM}$	3.0			A
Non-Repetitive Peak Surge Current ( Surge applied at rate load conditions halfware, single phase, 60Hz )	$I_{FSM}$	80			A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	- 65 to + 125			°C

**ELECTRICAL CHARACTERISTICS**


Characteristic	Symbol	MS20	MS21	MS22	Unit
Maximum Instantaneous Forward Voltage ( $I_F=3.0$ Amp ) ( $I_F=9.0$ Amp )	$V_F$	0.450 0.850	0.500 0.900	0.525 0.950	V
Maximum Instantaneous Reverse Current ( Rated DC Voltage, $T_C = 25$ °C ) ( Rated DC Voltage, $T_C = 100$ °C )	$I_R$	2.0 30			mA
Typical Junction Capacitance ( Reverse Voltage of 4 volts & f=1 MHz)	$C_P$	220			pF

**SCHOTTKY BARRIER  
RECTIFIERS**

**3.0 AMPERES  
20-40 VOLTS**



**DO-214AA(SMB)**




DIM	MILLMETERS	
	MIN	MAX
A	3.30	3.90
B	4.20	4.60
C	1.80	2.20
D	4.90	5.60
E	1.90	2.50
F	---	1.30
G	---	0.22
H	0.85	1.45


CASE---  
Transfer molded  
plastic

POLARITY---  
Cathode indicated  
polarity band


**FIG-1 FORWARD CURRENT DERATING CURVE**

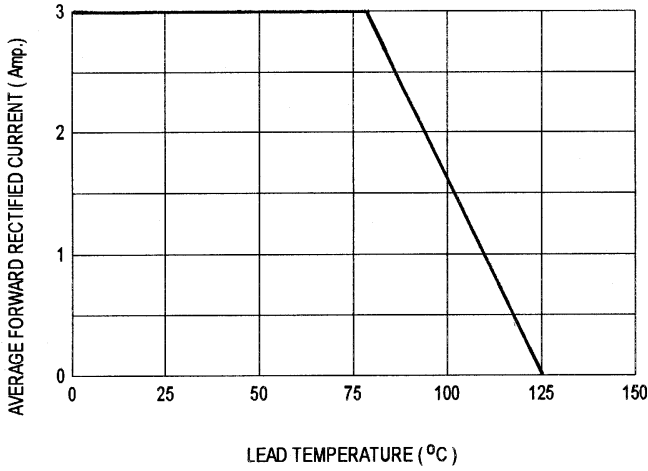


**FIG-2 TYPICAL FORWARD CHARACTERISTICS**

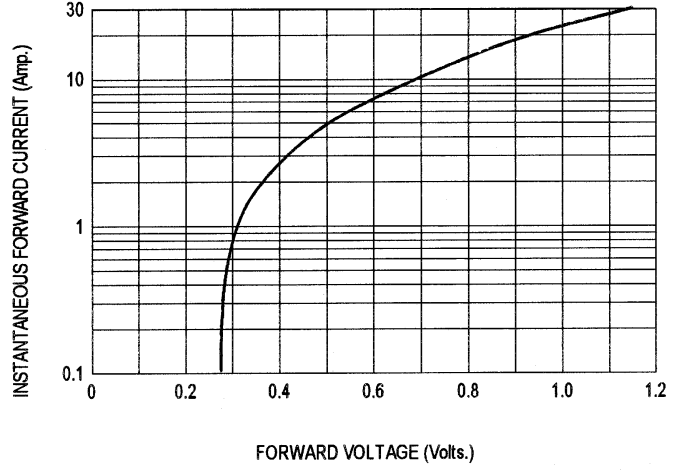


**FIG-3 TYPICAL REVERSE CHARACTERISTICS**

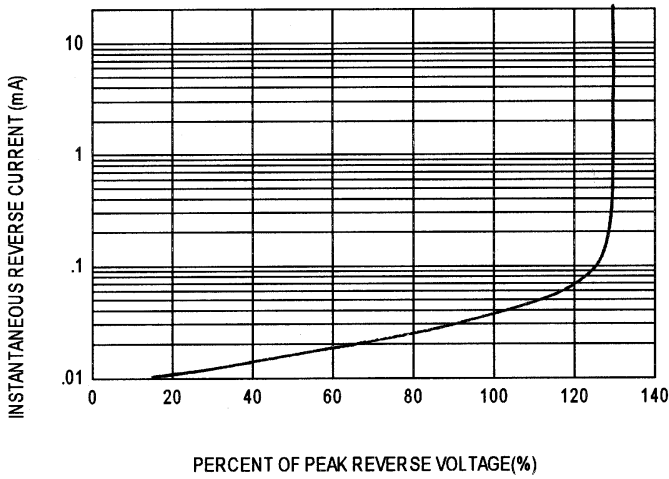

**FIG-4 TYPICAL JUNCTION CAPACITANCE**

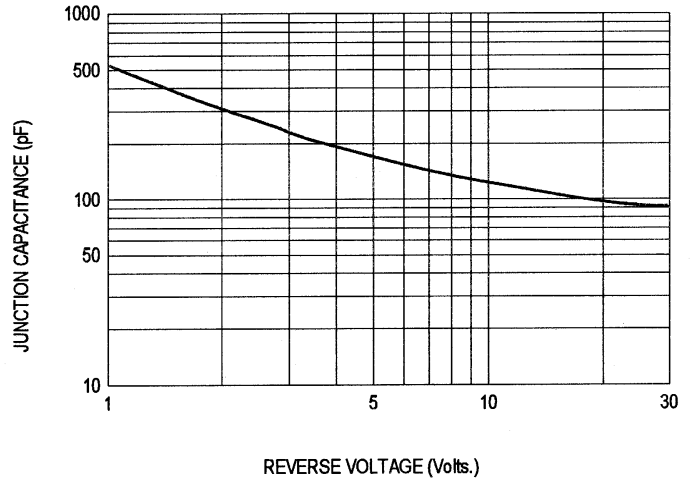

**FIG-5 PEAK FORWARD SURGE CURRENT**

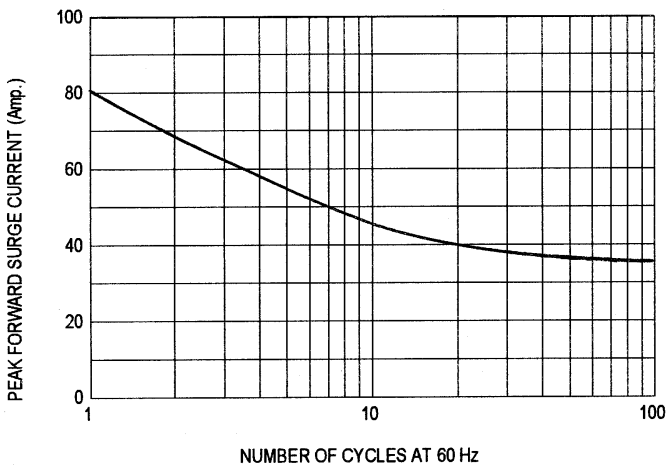

# MS21, MS22

FIG-1 FORWARD CURRENT DERATING CURVE

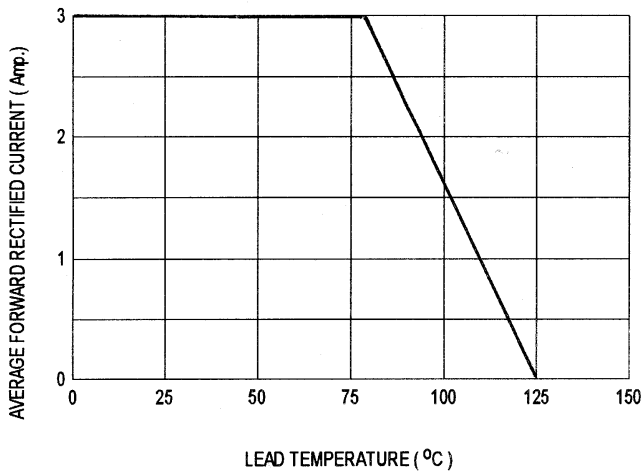


FIG-2 TYPICAL FORWARD CHARACTERISTICS

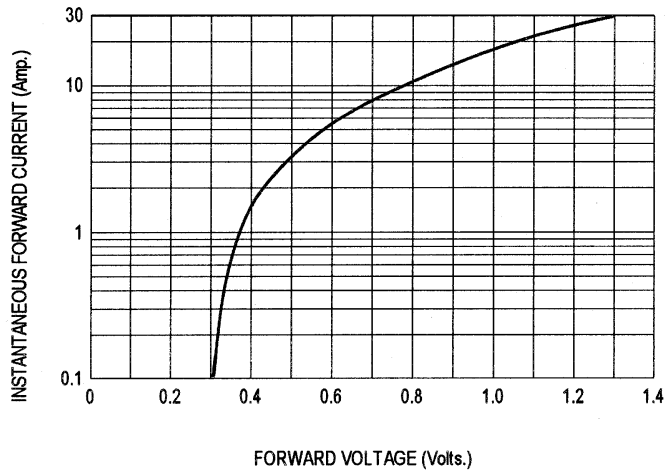


FIG-3 TYPICAL REVERSE CHARACTERISTICS

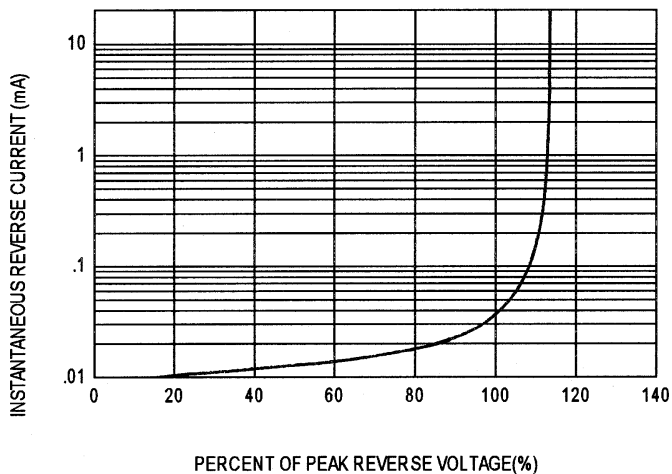


FIG-4 TYPICAL JUNCTION CAPACITANCE

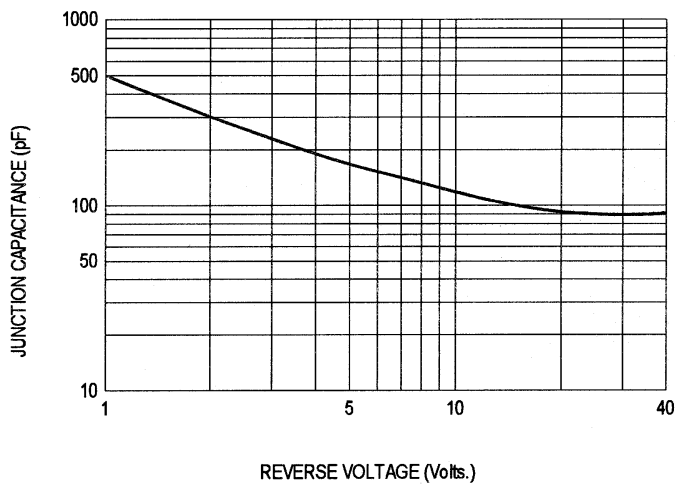


FIG-5 PEAK FORWARD SURGE CURRENT

