


NEW

Radiometrix



Hartcran House, 231 Kenton Lane, Harrow, HA3 8RP, England

Issue B, 03 April 2008

Tel: +44 (0) 20 8909 9595, Fax: +44 (0) 20 8909 2233

USX2

PRELIMINARY DATA SHEET

NBFM Multi-channel UHF Transceiver

USX2 is small multi-channel half duplex UHF transceiver available for operation on 315MHz, 433MHz and 458MHz bands with the user programmable RF power output of up to 100mW.

USX2 offers up to 128 frequency channels in 25kHz channel spacing. USX2 also features dual VCO which allows transmitter section to be operated on one frequency while receiver on another.



Figure 1: USX2-433-5

Features

- Conforms to ETSI EN 300 220-3 and EN 301 489-3
- High performance double superhet, 128 channel PLL synthesizer
- 100mW RF power output: adjustable via serial command
- Data rates up to 5 kbps for standard module
- Usable range over 500m
- Fully screened. Low profile
- Feature-rich interface (RSSI, analogue and digital baseband)
- Digital RSSI output
- Incorporate a 1200baud modem
- Re-programmable via RS232 interface
- Low power requirements

Applications

- Handheld terminals
- Heavy vehicle/machine remote controls
- EPOS equipment, barcode scanners
- Data loggers
- Industrial telemetry and telecommand
- In-building environmental monitoring and control
- High-end security and fire alarms
- Vehicle data up/download

Technical Summary

- Operating frequency: 315MHz (USA), 433MHz (European) and 458MHz (UK) bands
- 128 channels controlled via RS232 interface
- 16 channels selected by parallel interface
- Transmit power: 100mW (+20dBm) nominal. Adjustable 0.1 – 100mW
- Supply range: 3.6 - 15V
- Current consumption: 100mA (at 100mW output) transmit, 25mA receive
- Data bit rate: 5kbps max. (standard module)
- Receiver sensitivity: -118dBm (for 12 dB SINAD)
- Size: 50 x 30 x 12mm

USX2

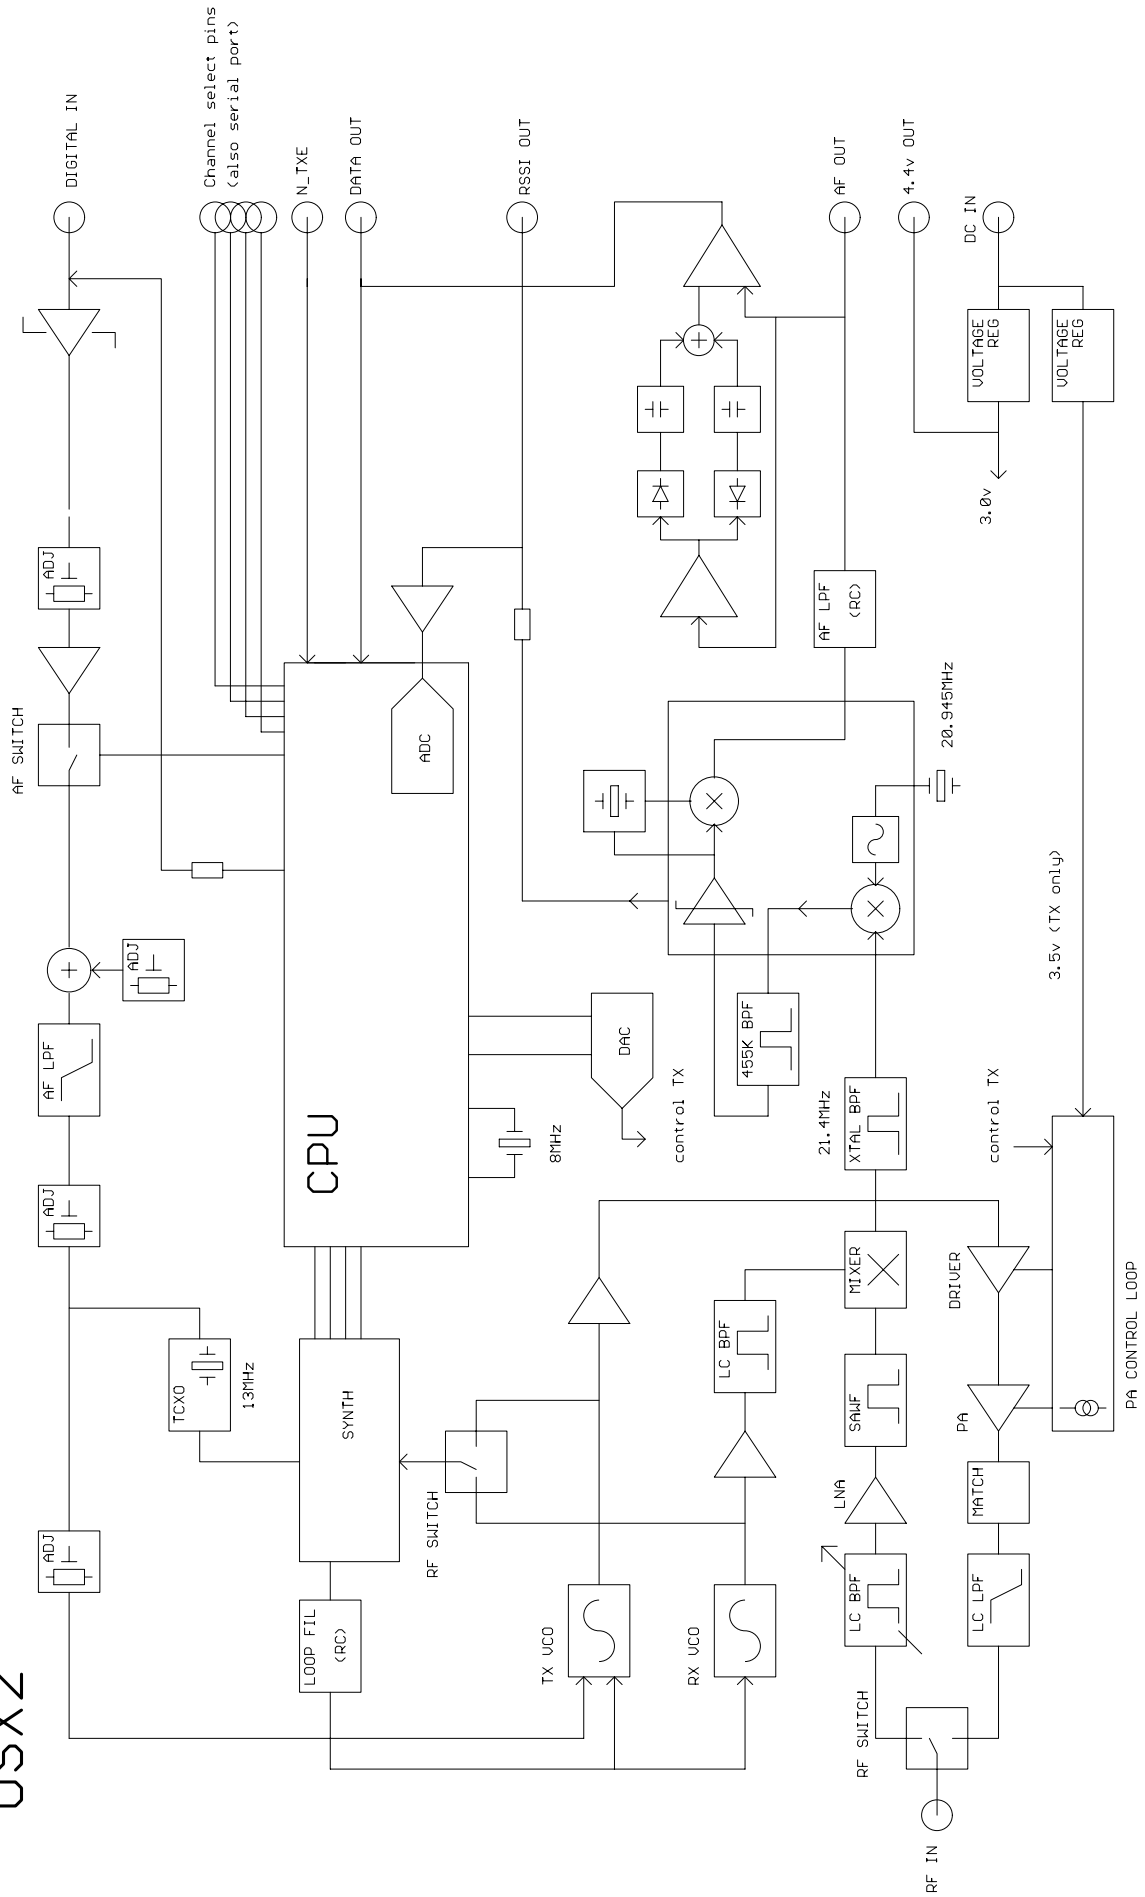


Figure 2: USX2 block diagram

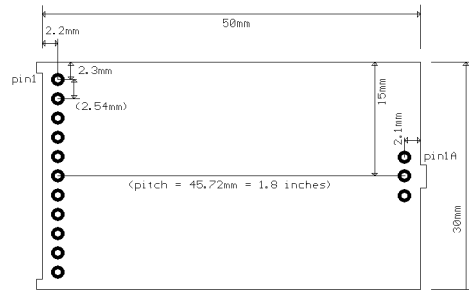


Figure 3: Provisional USX2 footprint

Pin Description

Pins	Normal mode	Serial mode	Modem mode
1A	RF Gnd	RF ground	
2A	RF in/out	To the antenna	
3A	RF Gnd	RF ground	
1	TXD	DC coupled input for TTL/ CMOS logic	NC
2	TXE	Transmit enable. Low = RX mode. High = TX. (10kΩ pull down)	NC
3	GND	(0V)	
4	Vcc	DC supply input (3.6 –15V)	
5	P3	Parallel channel select MSB	Serial read back
6	P2	Parallel channel select	TBA
7	P1	P1 - Parallel channel select	TBA
8	P0	P0 - Parallel channel select LSB	PGM in
9	RSSI	DC level between 0.5V and 2.5V. 60dB dynamic range	
10	RXD	Open collector output of data slicer	NC
11	AF out	500mV p-p audio. DC coupled, approx 0.8V bias	NC

NOTES:

1. No inversion occurs between TXD and RXD. However AF out *is* inverted relative to TXD.
2. Parallel channel selects (P0-P3) and TXE are active LOW and have 47kΩ internal pullups to 3V.
3. Open collector output RXD has a 47 kΩ pullup to 3V.
4. The software incorporates a 1200 baud modem, compatible with that implemented in other Radiometrix narrowband units (i1200 tones and format). Modem operation is selected by serial command.
5. Main serial port (P0, P3) operates at 9600 baud. (Command set is not the same as TR2M, SMX families). The unit is capable of operating in 'basic' parallel channel select only mode, or in serial controlled 'expanded' mode
6. Transmit power can be set by serial command
7. RSSI can be read back as a digital value. (on P3)
8. If analogue transmit modulation is needed, then connect a series 1μF cap + 500kΩ trimmer (a multiturn is advised) in the TXD circuit. Adjust trimmer for 90% of peak deviation (+/- 2.7KHz) at mean input level.

USX2 serial interface details (version 4): PRELIMINARY

The USX2 user interface is accessed through the four parallel pins (P0/serial through P3). It has four operating modes:

1. **Parallel.** Frequency of operation is selected as one of 16 (chans 0-15), by means of a 4 bit inverted value applied to P0-P3. The P0 pin will also respond to a LOCKSERIALMODE datastream (inverted rs232, 9600 baud), which will cause the radio to enter **serial** mode. In parallel mode, the IDENT command string is still decoded, but the unit remains in parallel mode.

2. **Serial.** Frequency of operation, radio set up, power output and various other parameters are controlled by command strings sent to P0. Pin P3 functions as a 'readback' port while P1,2 are not used in this mode.

In this mode, decimal values are used (to simplify direct manual programming via a terminal)

Commands include :

:	empty command buffer		
? or /	read back buffer contents		
<backspace>	delete last character		
<cr>	process buffer		
PARALLEL	return to the basic, parallel mode (and turn modem off)		
DUMP	read back contents of eeprom (output on P3)		
MODEM	activate 1200 baud modem		#
NOMODEM	de-activate 1200 baud modem		#
DEFCH ccc	set default channel	(non-volatile)	#
DEFPOW pp	set default tx power	(non-volatile)	#
CHAN ccc	jump to channel	(volatile)	
POWER pp	select tx power	(volatile)	
RSSI	single read of RSSI	(output on P3)	
SHORT	enter short command mode		#

(The following commands are used to set up the radio operating characteristics, and should be viewed with caution. Especially the CALPOWER command, which initiates a multiple write operation to the power calibration table)

NDIV nnnnn	force N divider value	(volatile)	
RDIV rrrrr	force R divider value	(volatile)	
RLOAD rrrrr	Set R divider value		#
OFFSET ooooo	Set RX offset		#
LOAD aa nnnnn	Set N values for first 16 channels		#
START nnnnn	Set N value for ch 16		#
STEP i	Set increment for table		#
LIMIT ccc	Set highest permitted channel number		#
SETPOW eee	Set maximum power output (100mW)		
CALPOWER (etc)	(see factory procedures for more details)		
TEST	Generate a 250Hz test modulation (only fuctions in TX mode, cancelled by sending a <cr> byte)		
IDENT	Readback a single byte, depending on current mode:		
	Parallel:	P	
	Serial:	S	
	Short:	1	
	Modem:	M	

(Channels 0-15 are individually programmed by the **LOAD** operation. Channels 16-127 are a consecutive table, using the **START** value as a start point (=channel 16) and increasing the N value by **STEP** with each increase in channel number)

ccc = a channel number from 00 to 127
aa = a **two** digit channel number from 00 to 15
nnnnn = synthesizer N register value, (up to 65535)
rrrrr = synthesizer R register value, (up to 16383)
pp = power setting value (0 - 30)
i = table step (increments of N) (0-7)
ooooo = receive mode frequency offset
eee = power calibration figure

$N = \text{channel frequency} / (13\text{MHz} / R)$

$13\text{MHz} / R = 25\text{KHz}$, so $R = 520$ (usually)

receive offset = $21.4\text{MHz} / (13\text{MHz} / R)$, so = 856 (usually)

A pause of at least 50mS must be allowed after operations which result in eeprom programming operations (all except NDIV, RDIV, GOTO, PSET and RSSI). This allows the programming cycle to complete.

Instructions marked ' # ' output a three byte ' OK<cr> ' sequence after successfully completing their eeprom programming cycles

When first powered up, the unit will operate on channel and output level specified by the last CHAN and POWER instructions, irrespective of previous NDIV, RDIV, CHAN or PSET operations)

3. **Short.** A limited range of radio functions are controlled by sending a single byte to PO

0 - 127	select channel	(volatile)
128 - 159	select power	(= byte -128) (volatile)
200	single read of RSSI	(output on P3)
201	single byte read, as for IDENT command	
222	reception of 16 consecutive 222 bytes returns radio to serial mode.	

This mode of operation is intended to provide a simple, fast, serial command mode.

4. **Modem.** Commands are interpreted as in SERIAL mode (and 'short' mode may be selected.) In this mode the unit operates as a simple 1200 baud packet modem, with TXD (in) on P2 and RXD (out) on P1.

The N_TXE pin does not control tx switching in this mode, but rather the presence of valid data in the tx buffer initiates a transmit burst. No handshaking is provided, and the unit has a sufficient over-link data rate to transparently 'stream' continuous data. Error correction, re-transmission of corrupt packets and addressing are not provided.

This mode is compatible with other Radiometrix 'i 1200' mode equipment, including the narrow band eval kit.

Notes:

Unlike in the RLC and TLC units, the LOCKSERIALMODE (and FAST) commands are non-volatile. Once a serial mode is selected, the unit will power up in this mode until a PARALLEL command is received.

The command interpreter IS case sensitive. Use upper case.

Spaces are optional (they are not decoded), provided the command line does not exceed 16 characters.

When manually programming this unit we recommend setting your terminal to local echo. The 'backspace' key functions normally.

All serial communications use 9600baud 'inverted RS232' 8 bit data, no parity, 1 start bit, 1 or 2 stop bits

A simple 'driver' program will be made available to simplify programming of these units, if desired.

RSSI read operations only function correctly if the unit is in RX mode (n_TXE pin is high or floating)

Condensed specifications (All details are provisional)

Frequency	315 - 315.375MHz (US band) 433.875 - 434.650MHz (433 MHz EU band) 458.525 - 459.1MHz (458MHz UK band)
<i>Frequency stability</i>	±1.5kHz
<i>Channel spacing</i>	25kHz
<i>Number of channels</i>	128 channels selected via serial RS232 interface First 16 are individually programmable Next 112 are a sequential table 16 channels selected via parallel interface
Supply <i>voltage</i>	3.6 -15V
<i>Current</i>	45mA transmit (at 10mW output) 100mA transmit (at 100mW output) 25mA receive (or modem 'idle')
Operating temperature	-20 to +70 C (Storage -30 to +70 C)
Size	50x 30 x 12 mm
Spurious radiations	Compliant with ETSI EN 300 220-3 and EN 301 489-3
Interface	
<i>User</i>	11 pin 0.1" pitch molex
<i>RF</i>	3 pin 0.1" pitch molex
<i>Reprogram</i>	5 pin 0.1" pitch socket in top of case
Recommended PCB hole size	1.2mm (min.)
Transmitter	
Output power	100mW (+20dBm); Adjustable via serial command 0.1 - 100mW
TX on switching time	<50 ms
Modulation type	FM, FSK (F1D, F3D)
TX modulation bandwidth	DC – 3kHz
Deviation	±3kHz
Adjacent channel TX power	-37dBm
TX spuri	<-40dBm
Inputs	Data (CMOS/TTL compatible)
Receiver	
Sensitivity	-118dBm for 12dB SINAD
image / spurious	-60dB
blocking	-84dB
adjacent channel	-60dB
Outputs	RSSI, Audio, Data

- Notes:** 1. The data slicer cannot be depended upon for data waveform frequencies below 250Hz
2. When RX is on and a transmitter keys up, again a 50ms period is required to stabilise data output mark/space. i.e. allow at least 50ms of preamble

Radiometrix Ltd
Hartcran House
231 Kenton Lane
Harrow, Middlesex
HA3 8RP
ENGLAND
Tel: +44 (0) 20 8909 9595
Fax: +44 (0) 20 8909 2233
sales@radiometrix.com
www.radiometrix.com

Copyright notice

This product data sheet is the original work and copyrighted property of Radiometrix Ltd. Reproduction in whole or in part must give clear acknowledgement to the copyright owner.

Limitation of liability

The information furnished by Radiometrix Ltd is believed to be accurate and reliable. Radiometrix Ltd reserves the right to make changes or improvements in the design, specification or manufacture of its subassembly products without notice. Radiometrix Ltd does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. This data sheet neither states nor implies warranty of any kind, including fitness for any particular application. These radio devices may be subject to radio interference and may not function as intended if interference is present. We do NOT recommend their use for life critical applications. The Intrastat commodity code for all our modules is: 8542 6000.

R&TTE Directive

After 7 April 2001 the manufacturer can only place finished product on the market under the provisions of the R&TTE Directive. Equipment within the scope of the R&TTE Directive may demonstrate compliance to the essential requirements specified in Article 3 of the Directive, as appropriate to the particular equipment. Further details are available on The Office of Communications (Ofcom) web site:

<http://www.ofcom.org.uk/radiocomms/ifi/>

*Information Requests
Ofcom
Riverside House
2a Southwark Bridge Road
London SE1 9HA
Tel: +44 (0)845 456 3000 or 020 7981 3040
Fax: +44 (0)20 7783 4033
information.requests@ofcom.org.uk*

*European Radiocommunications Office (ERO)
Peblingehus
Nansensgade 19
DK 1366 Copenhagen
Tel. +45 33896300
Fax +45 33896330
ero@ero.dk
www.ero.dk*