

Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

2N5551

Features

- This device is designed for general purpose high voltage amplifiers and gas discharge display drivers.
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1
- Marking:Type number
- Lead Free Finish/Rohs Compliant ("P"Suffix designates Compliant. See ordering information)

Maximum Ratings

| Symbol | Rating | Rating | Unit |
|------------------|--------------------------------|-------------|------|
| V_{CEO} | Collector-Emitter Voltage | 160 | V |
| V _{CBO} | Collector-Base Voltage | 180 | V |
| V_{EBO} | Emitter-Base Voltage | 6.0 | V |
| lc | Collector Current | 600 | mA |
| Pc | Collector Power Dissipation | 625 | mW |
| T_J | Operating Junction Temperature | -55 to +150 | °C |
| T _{STG} | Storage Temperature | -55 to +150 | °С |

Electrical Characteristics @ 25°C Unless Otherwise Specified


| Symbol | Parameter | Min | Max | Units | |
|----------------------|---|-----|-----|-------|--|
| OFF CHARA | OFF CHARACTERISTICS | | | | |
| V _{(BR)CEO} | Collector-Emitter Voltage* | | | | |
| | (lc=1.0mAdc, I _B =0) | 160 | | Vdc | |
| $V_{(BR)CBO}$ | Collector-Base Voltage | | | | |
| | (I _c =100uAdc, l _∈ =0) | 180 | | Vdc | |
| $V_{(BR)EBO}$ | Emitter-Base Voltage | | | | |
| | (I _E =10uAdc, I _C =0) | 6.0 | | Vdc | |
| Ісво | Collector Cutoff Current | | | | |
| | (V _{CB} =35Vdc, =0) | | 50 | nAdc | |
| | (V _{CB} =120Vdc, I _E =0, T _A =100°C) | | 50 | uAdc | |
| I _{EBO} | Emitter Cutoff Current | | 50 | nAdc | |
| | (V _{EB} =5.0Vdc, | | | | |

ON CHARACTERISTICS

| h _{FE} | DC Current gain | | | |
|----------------------|--|----|-----|-----|
| | (I _c =1.0mAdc, V _{cE} =5.0Vdc) | 80 | | |
| | (I _c =10mAdc, V _{cE} =5.0Vdc) | 80 | 250 | |
| | (I _c =50mAdc, V _{cE} =5.0Vdc) | 30 | | |
| V _{CE(sat)} | Collector-Emitter Saturation Voltage | | 0.5 | Vdc |
| , | (b=50mAdc, l₀=5.0mAdc) | | | |
| V _{BE(sat)} | Base- Emitter Voltage | | 1.0 | Vdc |
| (, , | (b=5.0mAdc, lc=50mAdc) | | | |

^{*} Pulse Test: Pulse Width<300us, Duty Cycle<2.0%

NPN General Purpose Amplifier Transistor

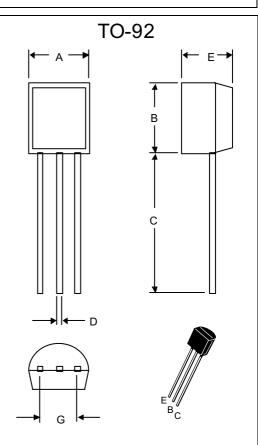

| DIMENSIONS | | | | | |
|------------|-------|------|-------|-------|------|
| | INOLI | 0 | | | |
| | INCH | -5 | IV. | IM | Į. |
| DIM | MIN | MAX | MIN | MAX | NOTE |
| Α | .170 | .190 | 4.33 | 4.83 | |
| В | .170 | .190 | 4.30 | 4.83 | |
| C | .550 | .590 | 13.97 | 14.97 | |
| D | .010 | .020 | 0.36 | 0.56 | |
| Е | .130 | .160 | 3.30 | 3.96 | |
| G | .096 | .104 | 2.44 | 2.64 | |
| | | | | | |

2N5551



ON CHARACTERISTICS

| f _T | Transistor Frequency | 100 | 300 | MHz |
|------------------|---|-----|-----|-----|
| | (V _{CE} =10Vdc, I _C =10mAdc) | | | |
| C_{ob} | Collector Output Capacitance | | 6.0 | pF |
| | (V _{CB} =10Vdc, I _E =0, f=1.0MHz) | | | |
| C _{ibo} | Input Capacitance | | 20 | pF |
| | (V _{CE} =10Vdc, I _C =0, f=1.0MHz) | | | · |



Micro Commercial Components

Ordering Information:

| Device | Packing |
|----------------|------------------------------|
| Part Number-AP | Ammo Packing: 2Kpcs/Ammo Box |
| Part Number-BP | Bulk: 100Kpcs/Carton |

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components* Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.