

MINI POWER STRIP SYSTEM MPT, MPS, MPTC, MPSC

SPECIFICATIONS

For complete specifications see www.samtec.com?MPT or see www.samtec.com?MPS

Insulator Material:

Black LCP

Terminal Material:

Copper Alloy

Plating:

Sn or Au over 50µ" (1,27µm) Ni

Operating Temp Range:

-55°C to +105°C with Tin

-55°C to +125°C with Gold

RoHS Compliant:

Yes

Processing:

Max Processing Temp:



230°C for 60 seconds, or

260°C for 20 seconds 3x

Lead-Free Solderable:

Yes

STACK HEIGHT

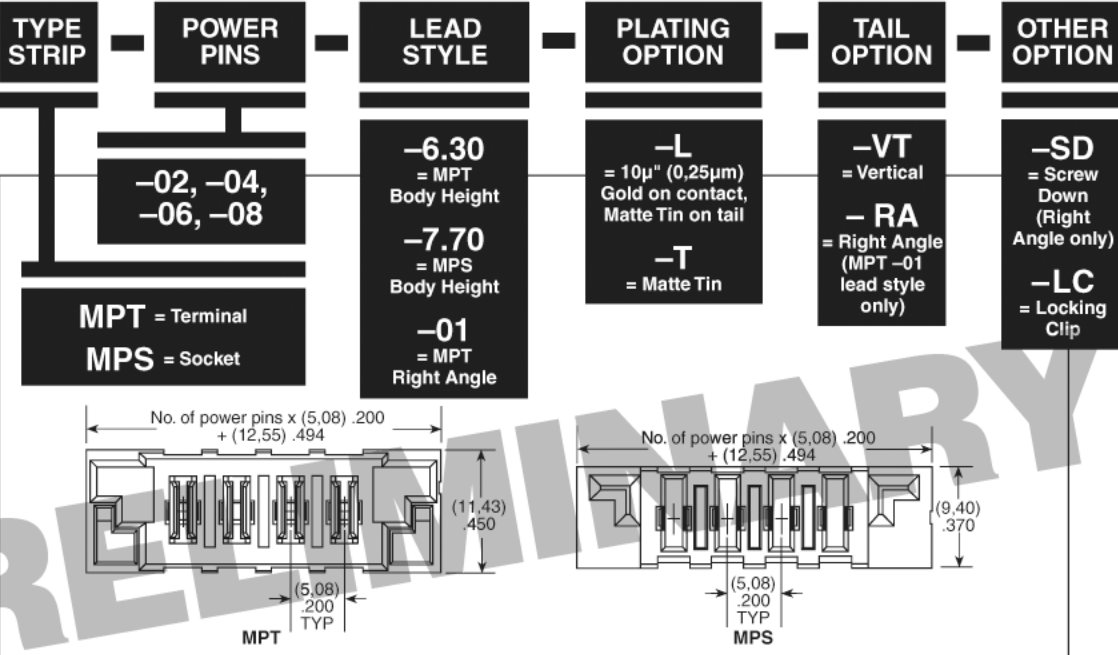

SPECIFICATIONS

For complete specifications see www.samtec.com?MPTC or www.samtec.com?MPSC

Insulator Material:

Black LCP

Terminal Material:

Copper Alloy

Plating:

Sn or Au over 50µ" (1,27µm) Ni

Operating Temp Range:

-55°C to +105°C

RoHS Compliant:

Yes

Processing:

Max Processing Temp:

230°C for 60 seconds, or


260°C for 20 seconds 3x

Lead-Free Solderable:

Yes

APPLICATION SPECIFIC OPTION

Asymmetric power pin placement.
Call Samtec.

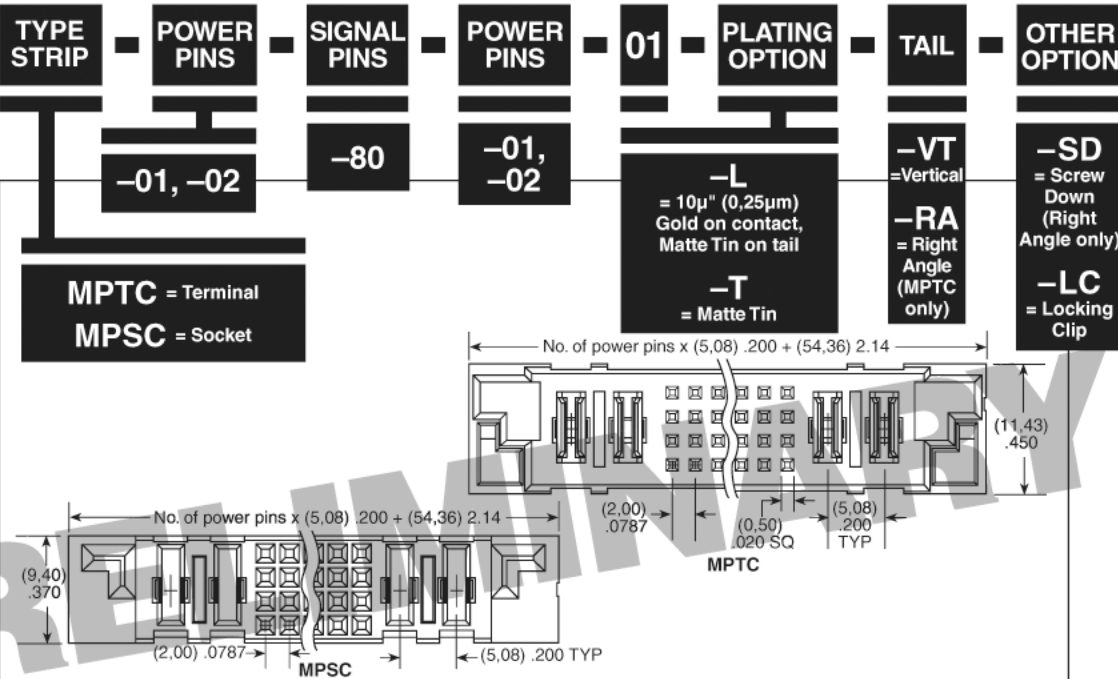

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-84420413
SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502
SAMTEC HONG KONG • Tel: 852-26904858 • Fax: 852-26904842
SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520
SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61
SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690
SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-61103766
SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432
SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187
SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159
SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745