

PHASE LOCKED OSCILLATOR

MODEL 622177 (3000 MHz)



Features

- Low Phase Noise: -97 dBc/Hz @ 100 Hz
- Low Spurious: -70 dBc Typical
- External Reference: 100 MHz
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -20 °C to +70 °C
Frequency	3000 MHz	3000 MHz
Output Power (dBm)	+13	+12
Variation Over Temperature (dBm)	+/- 0.75 dBm	+/- 1 dBm
Spurious (dBc)	-70	-60
Phase Noise (dB)	-68 dBc/Hz @ 10 Hz -97 dBc/Hz @ 100 Hz -122 dBc/Hz @ 1 KHz -130 dBc/Hz @ 10 KHz -135 dBc/Hz @ 100 KHz	
VSWR	1.5	2.0
Harmonics (dBc)	-25	-20
External Reference (MHz)	100	100
Lock Indicator	TTL (High=Locked)	TTL (Low=Unlocked)
Storage Temperature	-55 °C	+125 °C
Supply Power	DC	15
	mA	120
		125


Description

Spectrum Microwave's Series 600 Phase Locked Oscillators use a High "Q" Dielectric Resonator in the resonant circuit. The circuit is lightly loaded to obtain the lowest phase noise possible.

The resonator is screwed to a printed circuit board and well grounded to minimize modulation sidebands during shock and vibration.

Isolators are used to provide isolation from load VSWRs. Regulators filter noise on the DC input voltage.

Internal reference models are also available. A lock indicator circuit is provided to signal an out-of-lock condition.

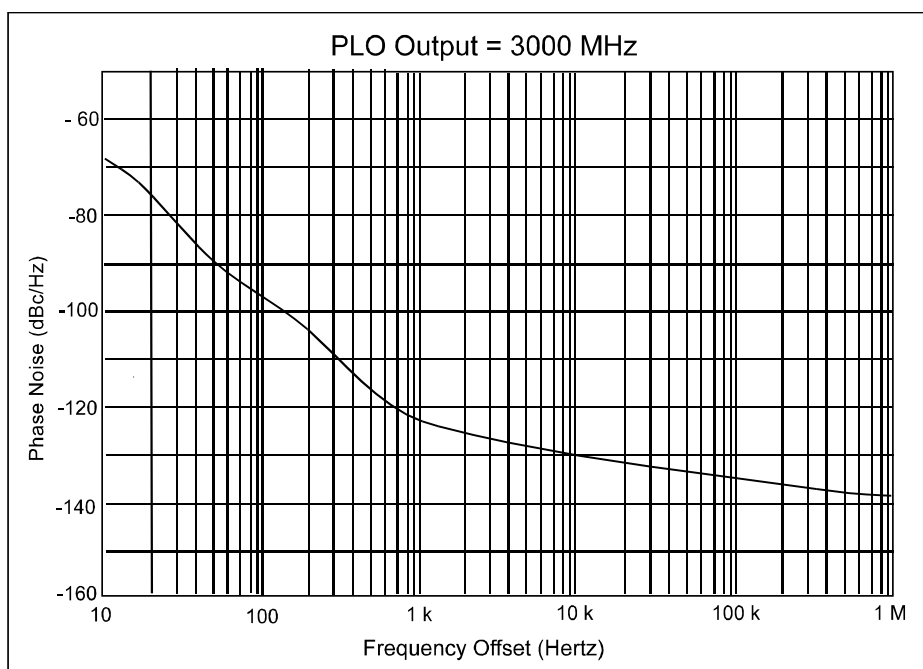

PHASE LOCKED OSCILLATOR

MODEL 622177 (3000 MHz)



Outline Drawing

