




## LH1000 S Series Sealed to IP66

## LED Lamps and LED Lamp Holders


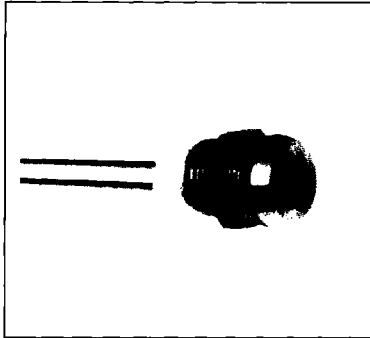


Voltage range to 2.5 VDC Type  
 Available with or without LED lamp.  
 Brass body with Black or Chrome finish.  
 Panel mtg hole 8.0 (.315)  
 Panel thickness 5.5 (.216)

ORDER FORMAT: LH 1048S (Without LED lamp, holder only)  
 LH 1048S 3700 (With Red LED lamp bare leads)

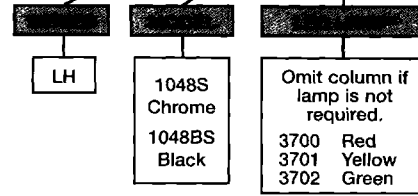


\*Lamp specifications see below.


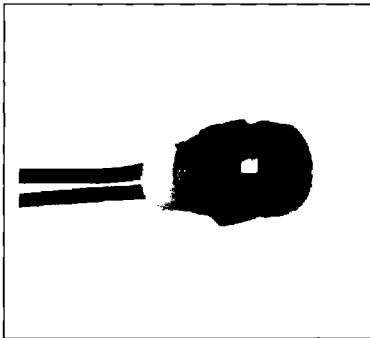


Voltage range to 28 VDC  
 Available with or without LED lamp.  
 Brass body with Black or Chrome finish.  
 Panel mtg hole 8.0 (.315)  
 Panel thickness 5.5 (.216)

ORDER FORMAT: LH 1048SWL (With Red LED lamp PVC leads 2.1 VDC)  
 LH 1048BSWL (With Red LED lamp PVC leads 12.0 VDC)  
 3700 3700 7

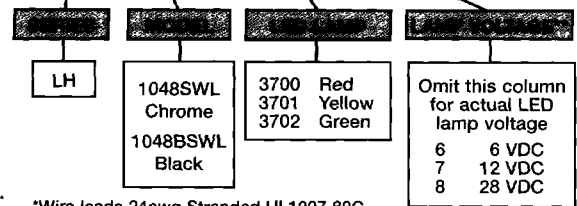


\*Wire leads 24awg Stranded UL1007 80C  
 Black and Red 5" min length 1/4" strip. Consult factory for alternative lengths.  
 \*\*Voltage dropping resistor located inline on Red lead for 6-28V.  
 Lamp specifications bottom of page.


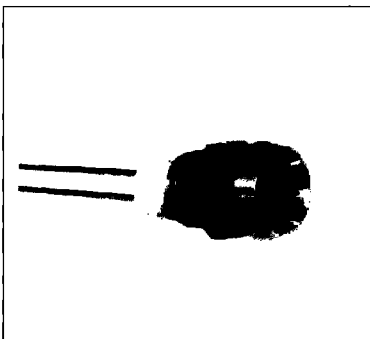


Voltage range to 2.5 VDC Type  
 Lamp recessed below bezel.  
 Available with or without LED lamp.  
 Brass body with Black or Chrome finish.  
 Panel mtg hole 8.0 (.315)  
 Panel thickness 7.0 (.275)

ORDER FORMAT: LH 1050S (Without LED lamp, holder only)  
 LH 1050S 3700 (With Red LED lamp bare leads)

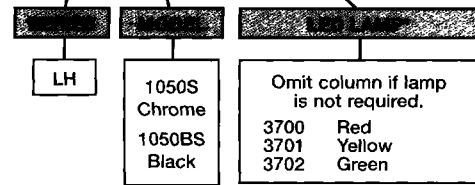


\*Lamp specifications bottom of page.

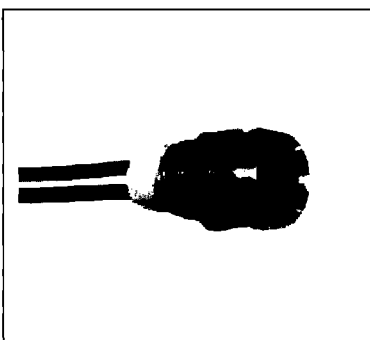

Voltage range to 28 VDC  
 Available with or without LED lamp.  
 Brass body with Black or Chrome finish.  
 Panel mtg hole 8.0 (.315)  
 Panel thickness 7.0 (.275)

ORDER FORMAT: LH 1050SWL (With Red LED lamp PVC leads 2.1 VDC)  
 LH 1050BSWL (With Red LED lamp PVC leads 12.0 VDC)  
 3700 3700 7

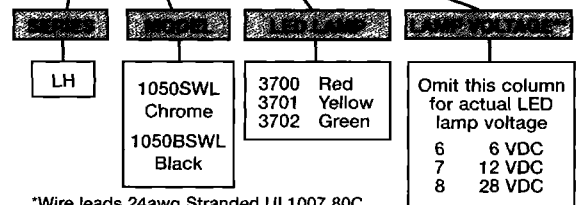

\*Wire leads 24awg Stranded UL1007 80C  
 Black and Red 5" min length 1/4" strip. Consult factory for alternative lengths.  
 \*\*Voltage dropping resistor located inline on Red lead for 6-28V.  
 Lamp specifications bottom of page.

### LAMP SPECIFICATIONS

T1.3/4 (5mm)

SUPER BRIGHTNESS DIFFUSED

LAMP	OUTPUT COLOR	PACKAGE COLOR	VIEW DEG	MIN MCD	TYP MCD	RATED ma	VOLT TYP	VOLT MAX	FORWARD CONT ma	PEAK WAVE NM
3700	Red	Red	30	3.0	6.0	10	2.1	2.5	30	700
3701	Yellow	Yellow	30	8.0	16	20	2.2	2.5	50	580
3702	Green	Green	30	5.0	8.0	20	2.1	2.5	50	555