

# RF AMPLIFIER

## MODEL *TM5441*

Available as: TM5441, 4 Pin TO-8 (T4)  
 TN5441, 4 Pin Surface Mount (SM3)  
 FP5441, 4 Pin Flatpack (FP4)  
 BX5441, Connectorized Housing (H1)

### Features

- 5 Volt Operation
- Power Output: +15 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

### Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10-400 MHz	10-400 MHz
Gain (dB)	14.5	13.0 Min.
Power @ 1 dB Comp. (dBm)	+15	+12.0 Min.
Reverse Isolation (dB)	-20	-17 Max.
VSWR In	1.25:1	2.0:1 Max.
Out	1.6:1	2.0:1 Max.
Noise Figure (dB)	3.8	4.5 Max.
Power Vdc	+5	+5 Min.
mA	33	36 Max.

Note: Care should always be taken to effectively ground the case of each unit.


### Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point ..... +39 dBm (Typ.)  
 Second Order Two Tone Intercept Point ..... +33 dBm (Typ.)  
 Third Order Two Tone Intercept Point ..... +25 dBm (Typ.)

### Maximum Ratings

Ambient Operating Temperature ..... -55°C to + 100 °C  
 Storage Temperature ..... -62°C to + 125 °C  
 Case Temperature ..... + 125 °C  
 DC Voltage ..... + 8 Volts  
 Continuous RF Input Power ..... + 18 dBm  
 Short Term RF Input Power ..... 50 Milliwatts (1 Minute Max.)  
 Maximum Peak Power ..... 0.5 Watt (3 µsec Max.)

### Typical Performance Data

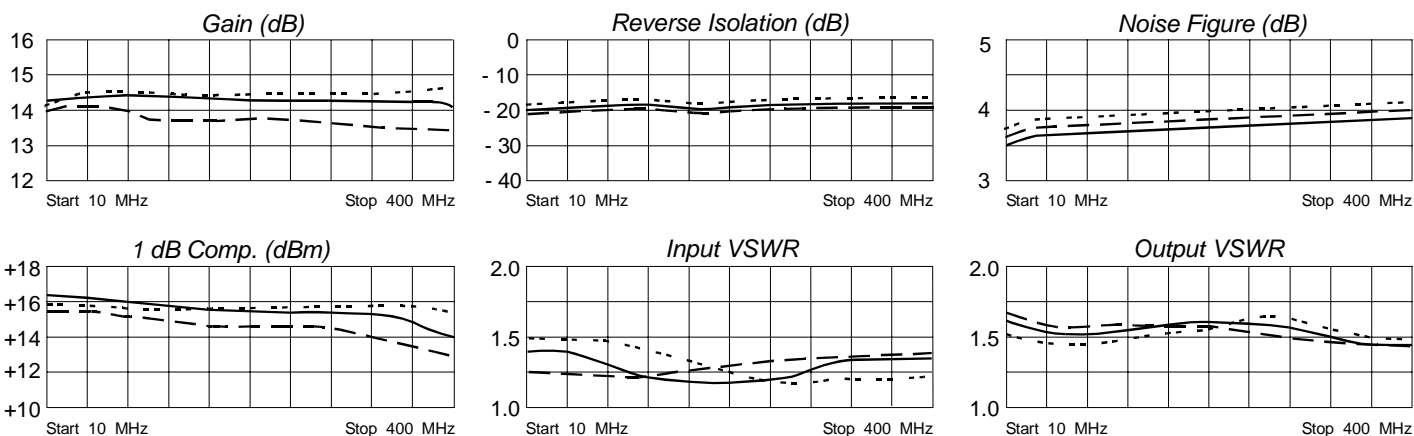

Legend ——— + 25 °C    - - - - + 85 °C    ······ -55 °C

### Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.15	-147	5.21	-176	.10	6	.24	169
50	.13	-177	6.29	162	.10	- 7	.22	180
100	.12	178	5.22	142	.10	- 15	.22	-178
200	.09	-165	5.10	103	.10	- 33	.24	179
300	.12	-149	5.10	62	.11	- 54	.22	158
400	.14	166	5.01	13	.12	- 82	.18	80
500	.22	31	4.06	- 47	.11	-128	.49	- 23



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 6/22/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001