


UNCONTROLLED DOCUMENT

PART NUMBER		REV.
SSI-LX5093YD-42877		B
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10549.	8-25-99
B	E.C.N. #10BRDR. & REDRAWN, & #10623	5-17-00

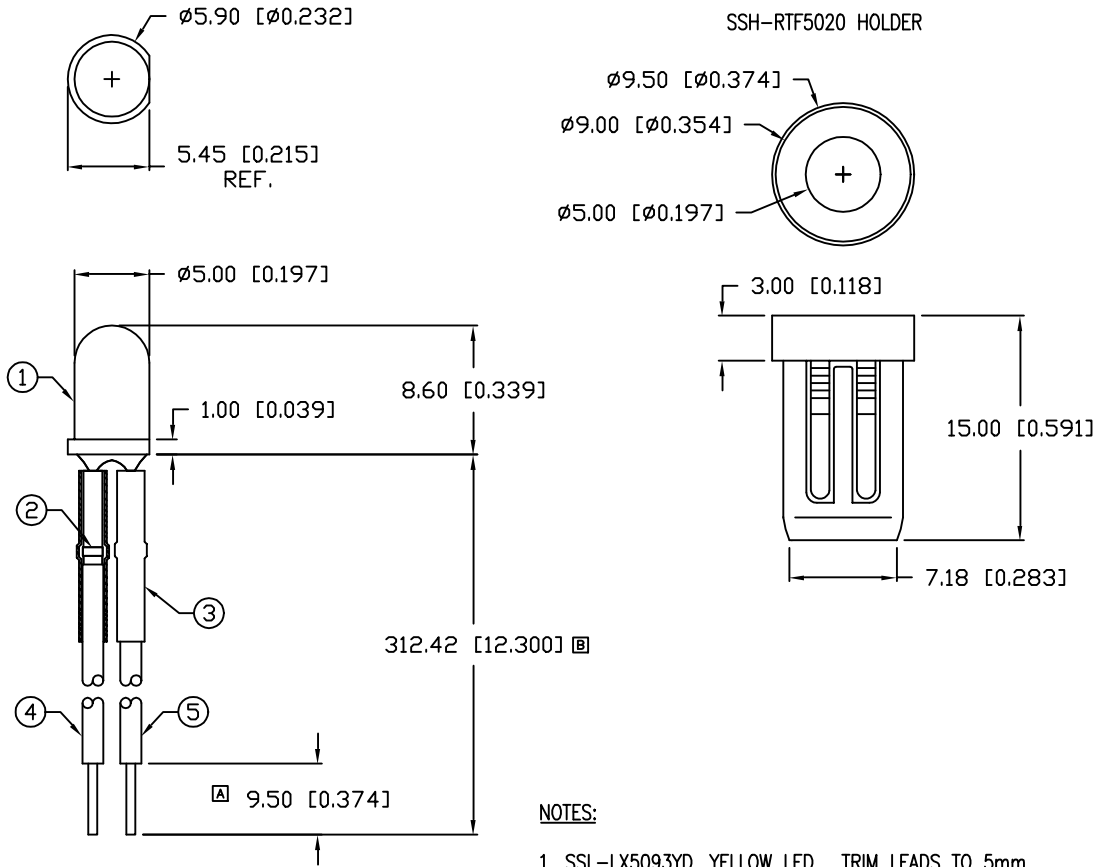

NOTES:

1. SSL-LX5093YD, YELLOW LED. TRIM LEADS TO 5mm.
2. CRIMP LEADS WIRES TO LED LEADS, (2 PLS.).
3. HEAT SHRINK INSULATION, 13mm IN LENGTH, (2 PCS.)
4. ANODE: LXP-WST24RDT0C, RED, TINNED OVERCOAT, CUT AT 310mm, STRIP 3mm & 9.5mm.
5. CATHODE: LXP-WST24BLT0C, BLACK, TINNED OVERCOAT, CUT AT 310mm, STRIP 3mm & 9.5mm.
6. SSH-RTF5020, BULK PACKED SEPERATELY.
7. PANEL HOLE:  $\phi 8.05$  [0.317]. PANEL THICKNESS: 0.6~2.8 [0.024~.110].

ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^\circ\text{C}$   $I_f=20\text{mA}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585 (YELLOW)		nm	
FORWARD VOLTAGE		2.1	2.5	$V_f$	
REVERSE VOLTAGE	5.0			$V_r$	$I_f=100\mu\text{A}$
AXIAL INTENSITY		30		mcd	$I_f=20\text{mA}$
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		3 SEC. MAX

\*  $t < 10\mu\text{s}$

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

REV.	PART NUMBER
B	SSI-LX5093YD-42877

T-5mm (T-1 3/4), 585nm YELLOW LED, YELLOW DIFFUSED LENS, WITH 12.3" WIRE LEADS, HOLDER PACKAGED SEPERATELY.

**CONFIDENTIAL INFORMATION**  
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

**RELIABILITY NOTE**  
 OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELLEN ROAD  
 PALATINE, ILLINOIS 60067  
 PHONE: (847) 359-2790  
 WEB: <http://www.lumex.com>

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 7-21-99
SK			PAGE: 1 OF 1
			SCALE: N/A