

CKCL44X7R1H222M085AA

TDK Item Description : CKCL44X7R1H222MT****




Application & Main Feature

Commercial Grade (4 in 1 Array)

Series

CKCL44(2012) [EIA CC0805]

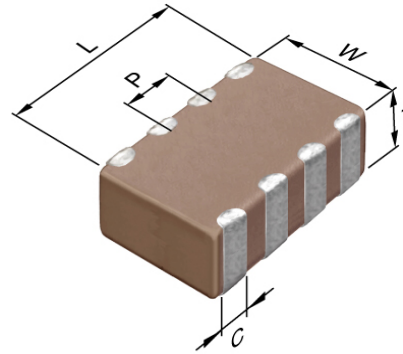

Dimensions

L 2.00mm +/-0.15mm
 W 1.25mm +/-0.15mm
 T 0.85mm +/-0.15mm
 C 0.25mm Nom.
 P 0.50mm Nom.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

1H (50Vdc)

Capacitance

2.2nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

3% Max.


Insulation Resistance

10Gohm Min.


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

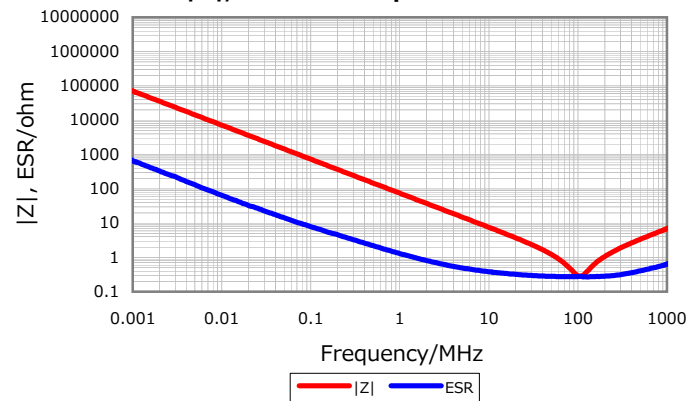


Cap. vs. Freq. Characteristic

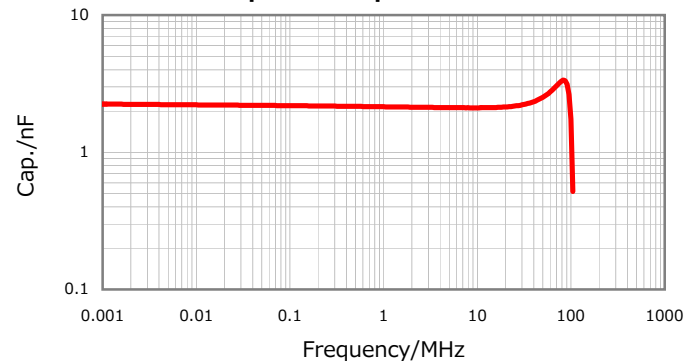


DC Bias Characteristic

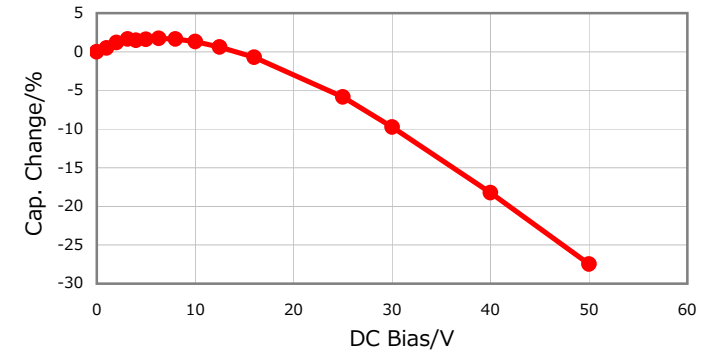

Temperature Characteristics

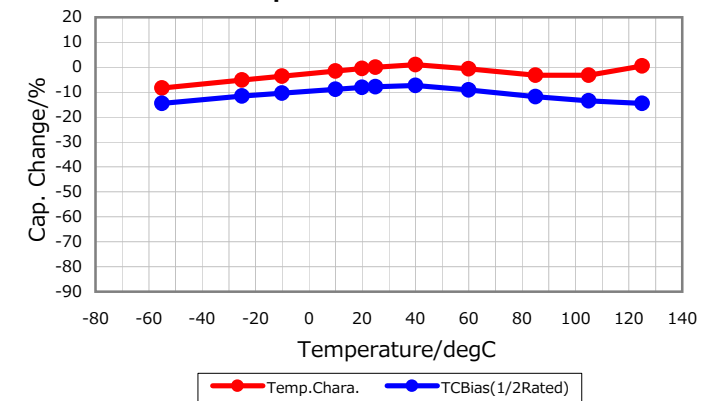

Ripple Temperature Rise Characteristics

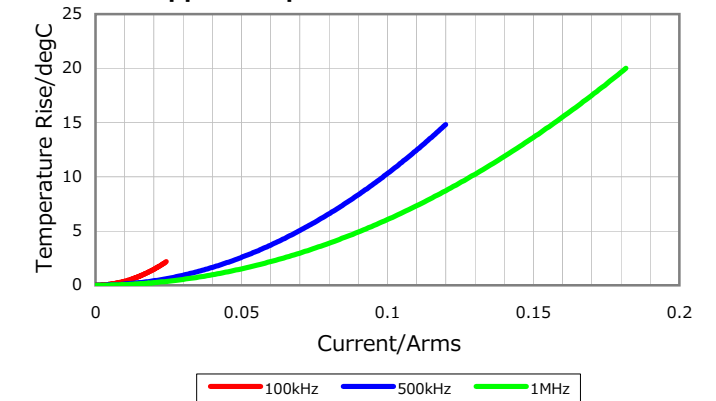

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

January 4, 2016